
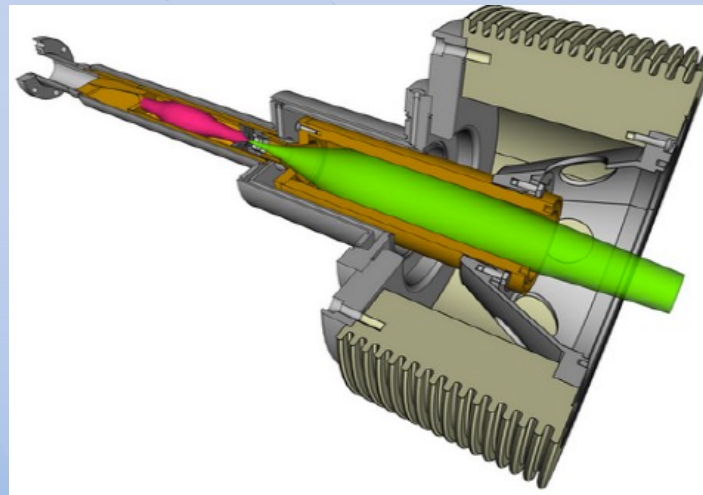


A High Current Pure Proton Beam Source Prototype

Vadim Skalyga, Alexei Bokhanov, Sergey Golubev, Ivan Izotov, Sergey Vybin


Institute of Applied Physics Russian Academy of Sciences

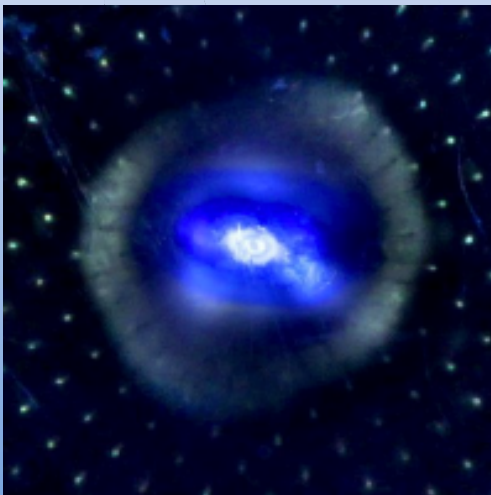

The work was supported by the project of the Russian Science Foundation Grant No. 21-12-00297


Outline

- ❖ Proton injectors for linear accelerators
- ❖ High-frequency ECR ion sources
- ❖ High-current gasdynamic ECR ion sources at the IAP RAS
- ❖ Proton beams formation at SMIS 37 and GISMO
- ❖ New approach for high-current ion beam formation

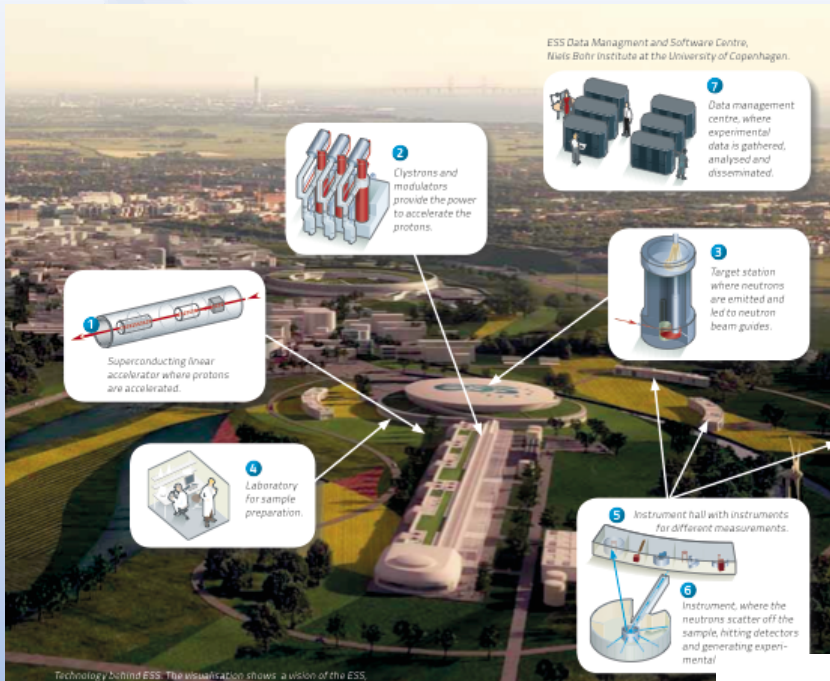

ESS:
Proton source
 H^+ , ECR 2.45 GHz,
90 mA, 75 kV,
 14 Hz 3 ms,
 $\epsilon=0.2 \pi \cdot \text{mm} \cdot \text{mrad}$


IFMIF:
Deuteron source
 D^+ , ECR 2.45 GHz
 $2 \cdot 125 \text{ mA}$, 100 kV, CW
 $\epsilon=0.2 \pi \cdot \text{mm} \cdot \text{mrad}$

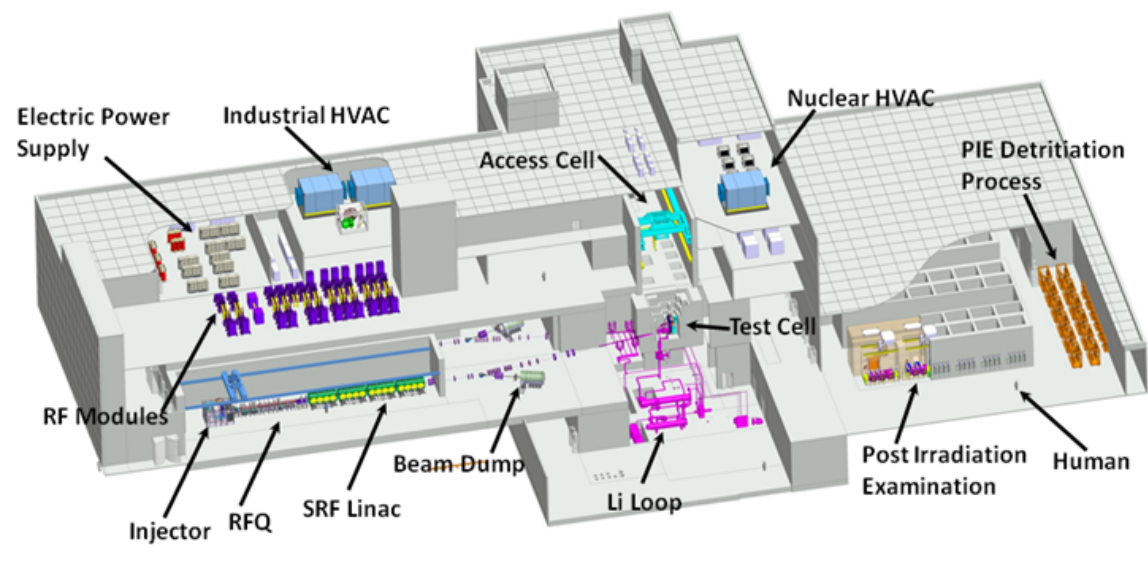

DARIA

compact neutron sources


neutron source Dedicated to Applied Research and Industrial Applications

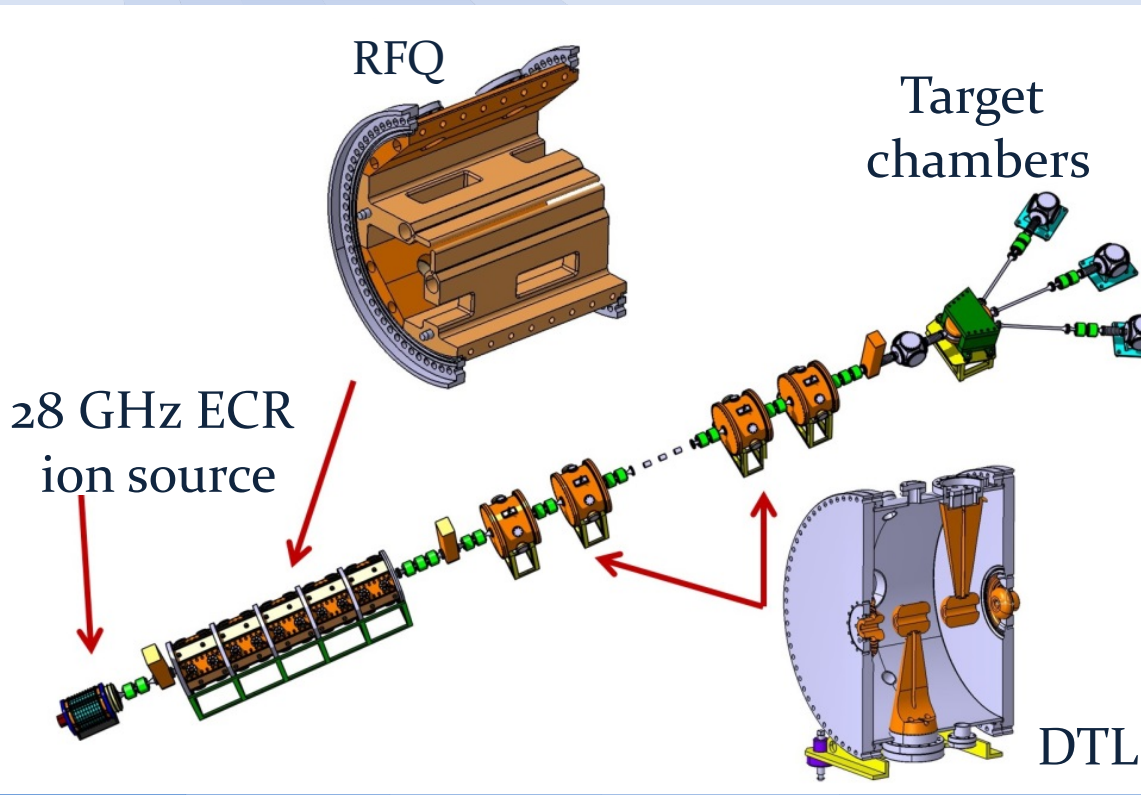

Ions: protons
 Beam energy: 13 MeV
 Target: Beryllium

Operation: pulsed
 Current: 80-100 mA
 Pulse duration: 100 us
 Rep. rate: 100 Hz

SMIS 37 Gasdynamic ECR ion source

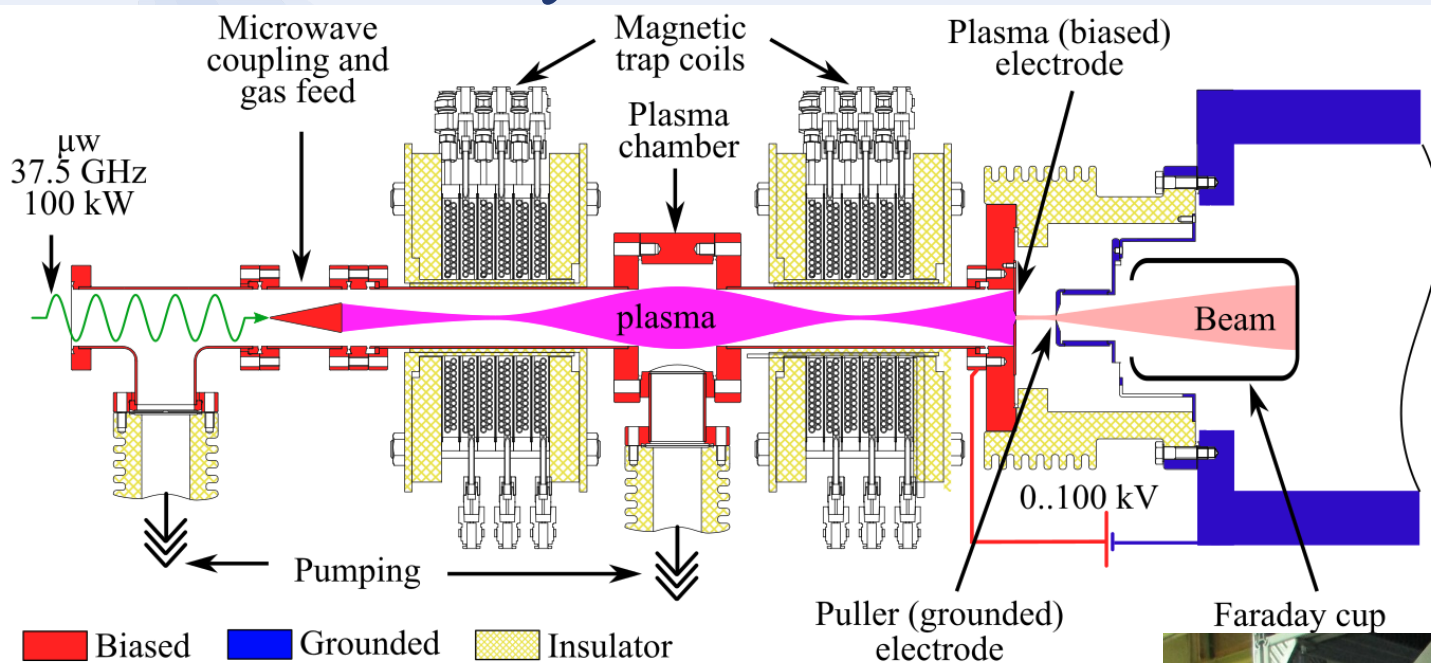

Microwave power: 100 kW

Heating frequency: 37.5 GHz

Maximum B_{\max} value = 4T

Pulse duration - 1ms


Extraction: up to 100 kV

Plasma parameters:



($N_e > 10^{13} \text{ cm}^{-3}$, $\tau \approx 5 \div 50 \mu\text{s}$, $T_e \approx 50 \div 300 \text{ eV}$)

Record ion beam current ($j \approx 100 \div 1200 \text{ mA/cm}^2$)


Low ion beam emittance

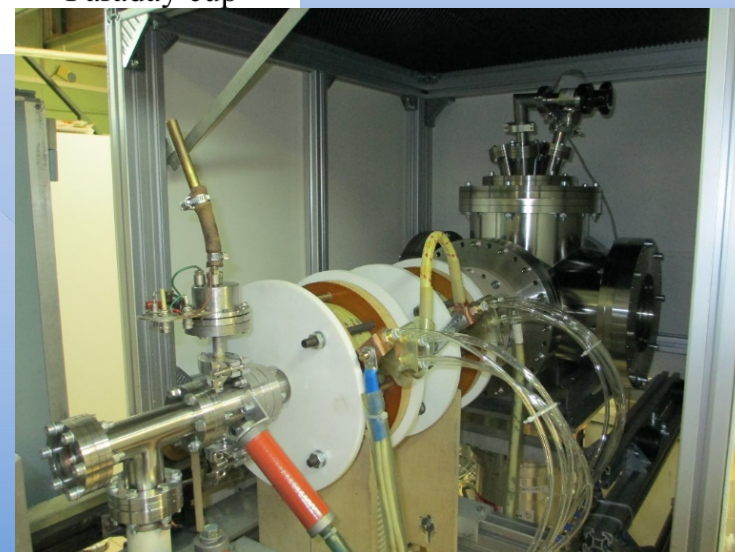





Proton beam production at SMIS 37

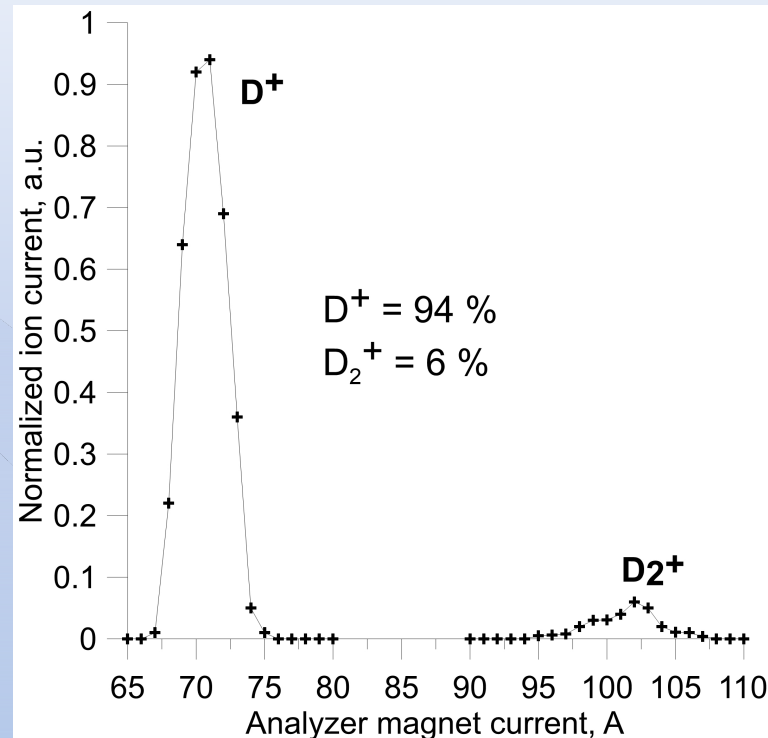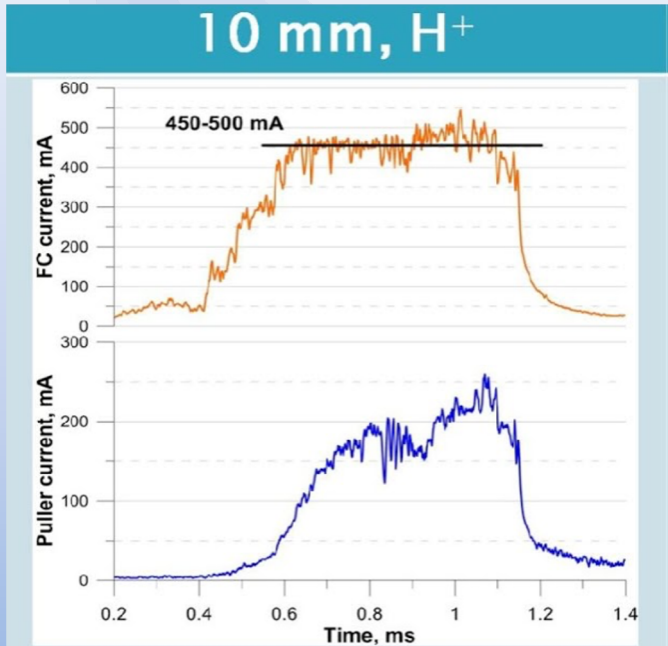

Pulsed proton beams were demonstrated
with current **100 – 500 mA**
and current density up to **800 mA/cm²**

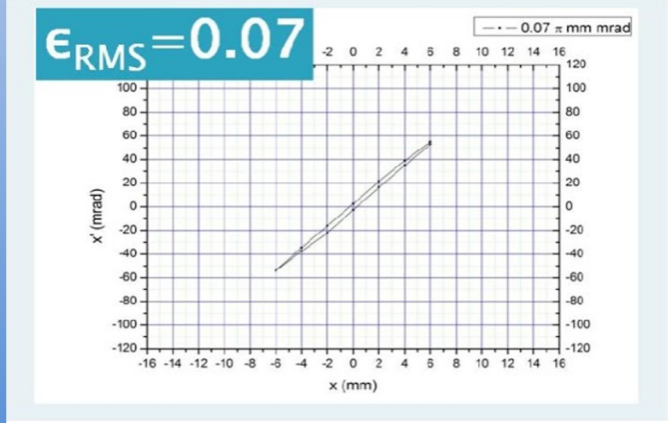


New *GISMO* (Gasdynamic Ion Source for Multipurpose Operation)

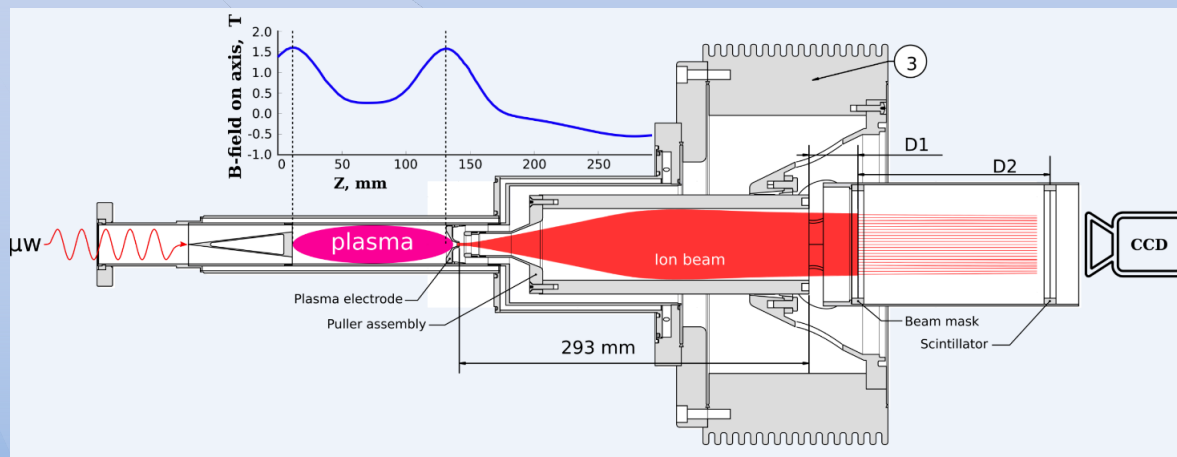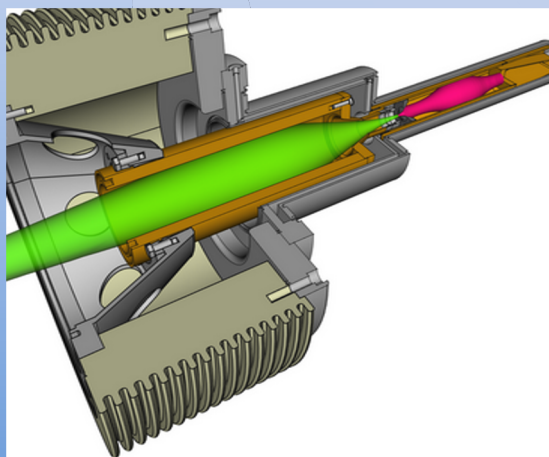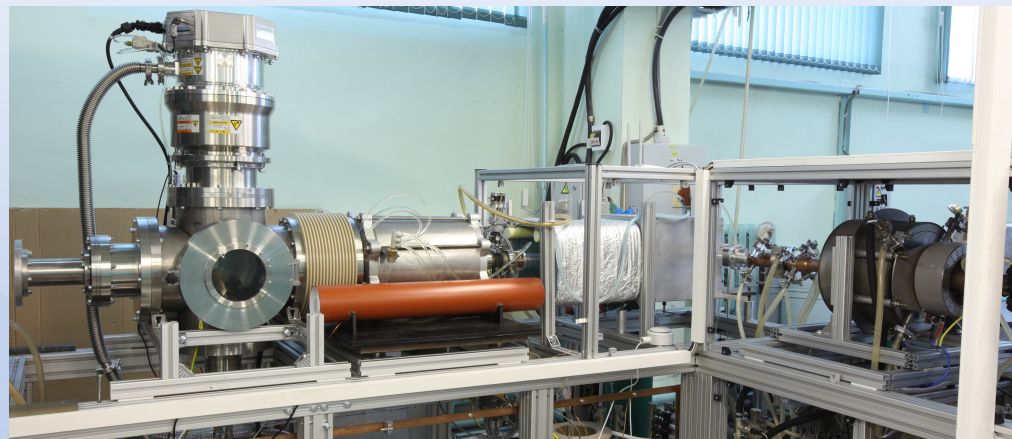
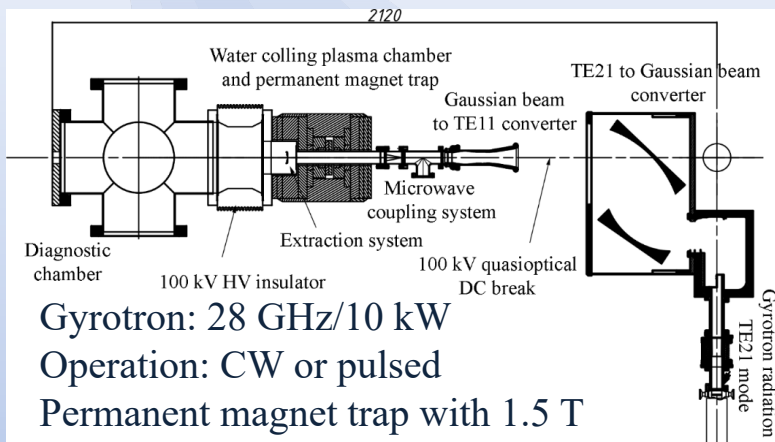


$N_e \sim 10^{13} \text{ cm}^{-3}$	$V_p \sim 40 \text{ cm}^3$	$Q \sim 250 \text{ W/cm}^3$
$T_e \sim 50-300 \text{ eV}$	$\tau_e \sim 10 \mu\text{s}$	$J \sim 1.5 \text{ A/cm}^2$

Proton beams production at GISMO

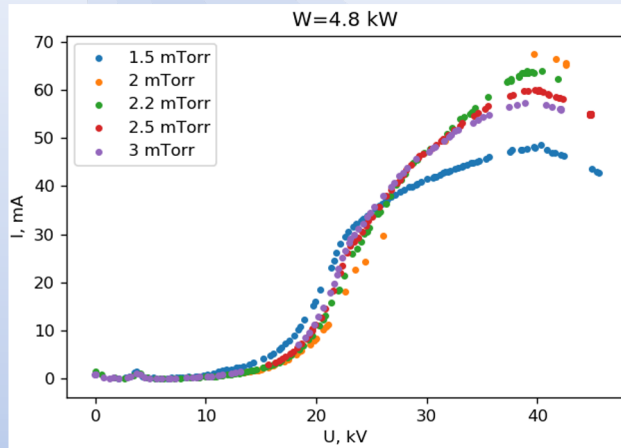

70 mA of pure protons was extracted using 3 mm extraction aperture
(almost 1 A/cm² of ion beam current density with high beam quality)

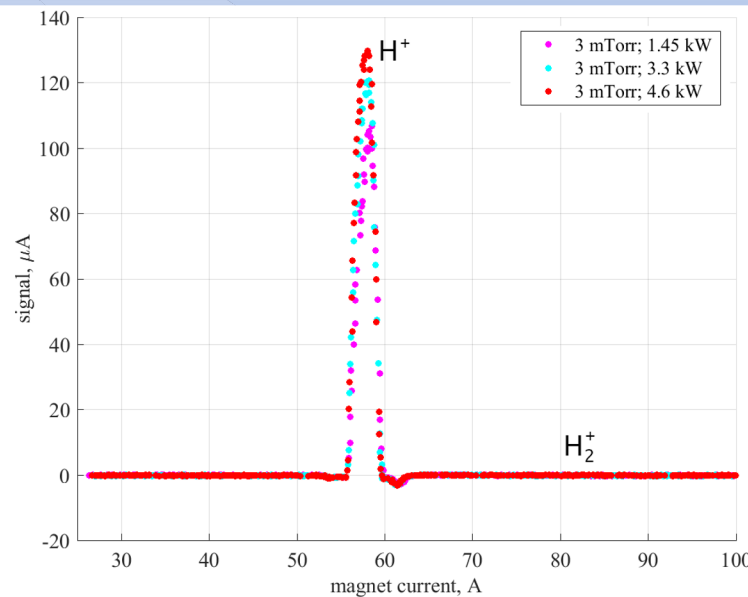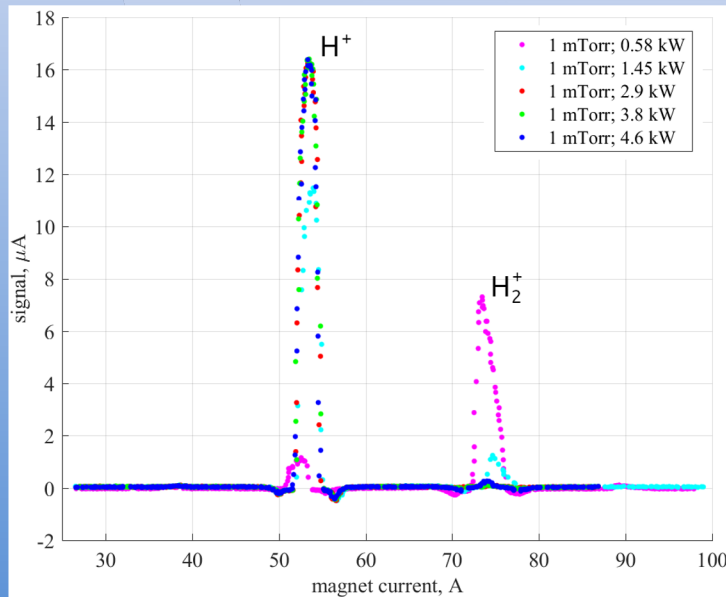

Emittance measurements with ITEP Accelerator Department team

T.V. Kulevoy, G.N. Kropachev, A.L. Sitnikov

DARIA requirements:



Beam current 70-100 mA

Normalized RMS emittance $< 0.4 \pi \cdot \text{mm} \cdot \text{mrad}$






Pulse duration 100 μs

Repetition rate 100 Hz

Have been almost fulfilled at GISMO already

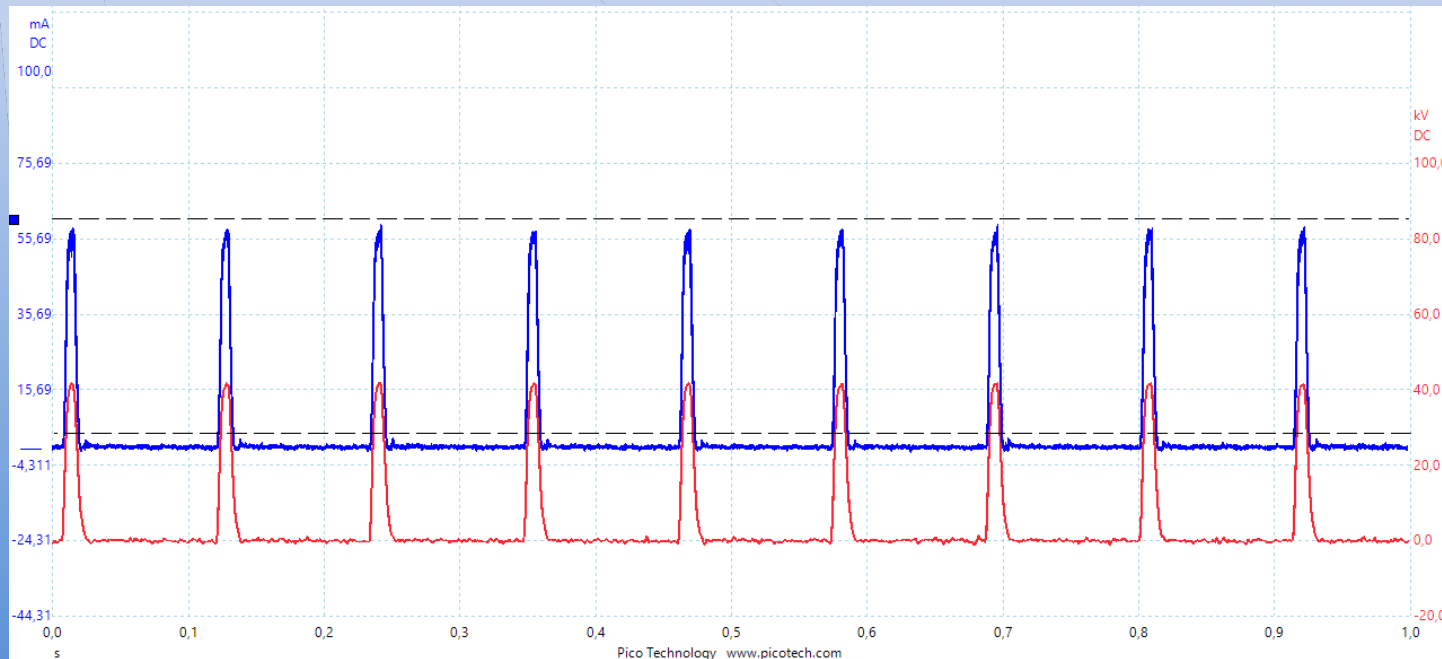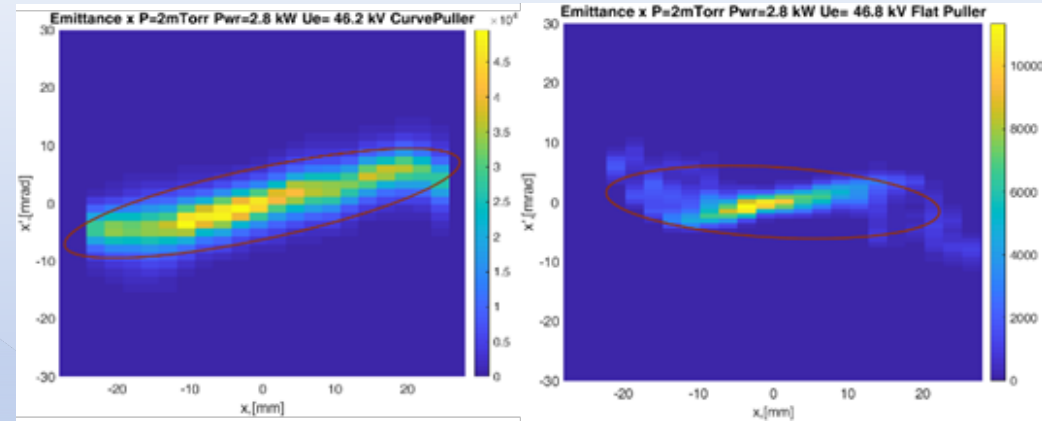

New approach for high-current ion beam formation

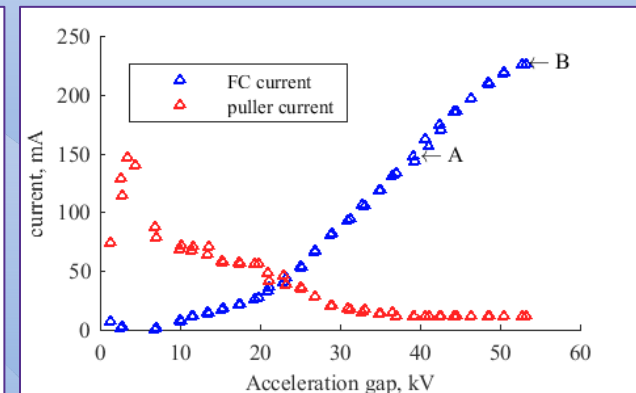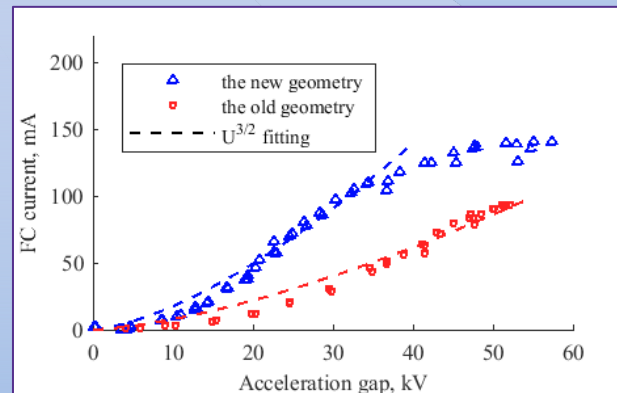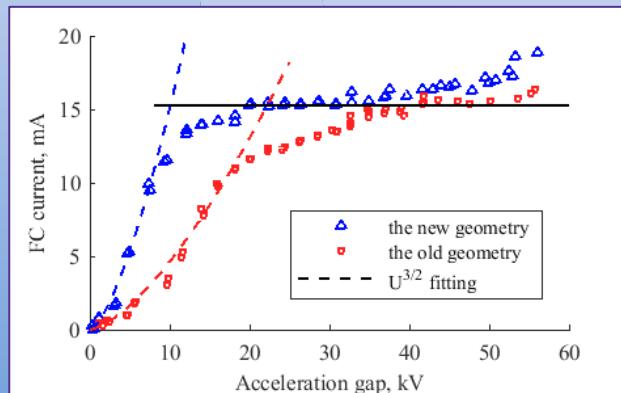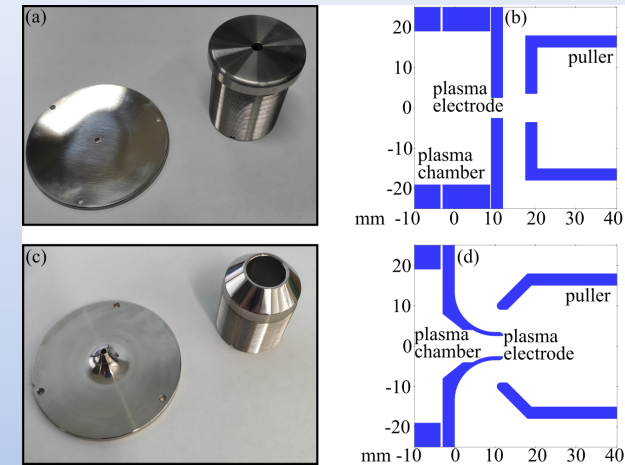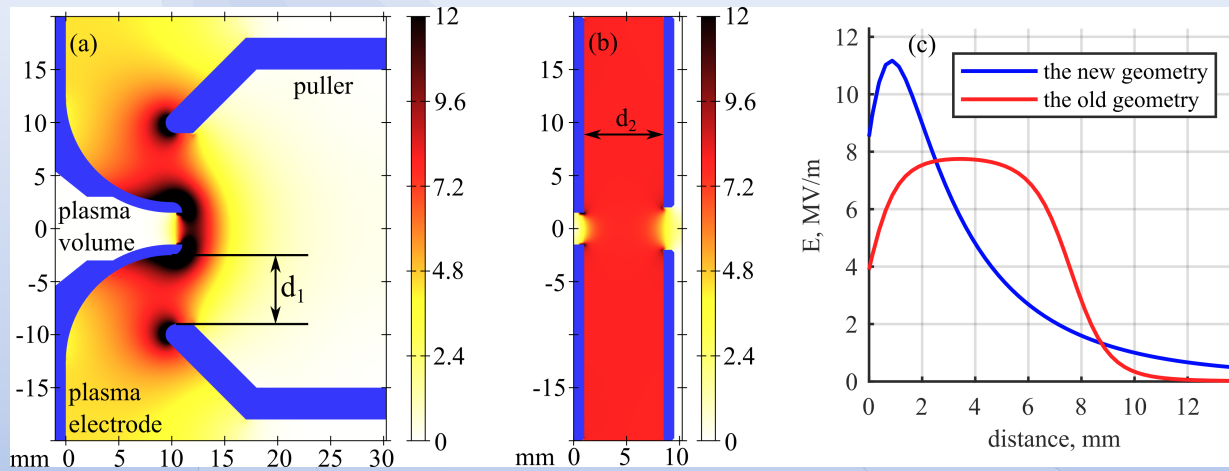

Optimal extraction voltage have been reduced 2 times

1.1 A/cm² have been reached!

Conclusions

- ✓ Pure proton beam extraction from the 28 GHz ECR discharge plasma was demonstrated
- ✓ Beam current densities above 1 A/cm^2 have been achieved
- ✓ New extraction system for high-current density beams was proposed and tested
- ✓ Prototype of proton injector is under final design

Thank you for your attention!