
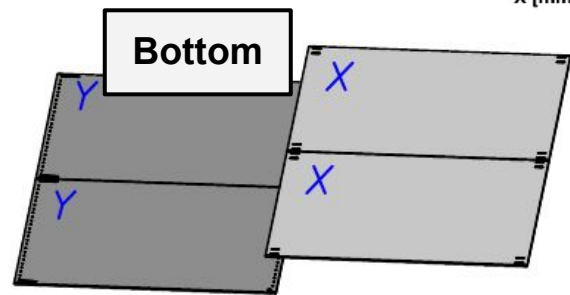
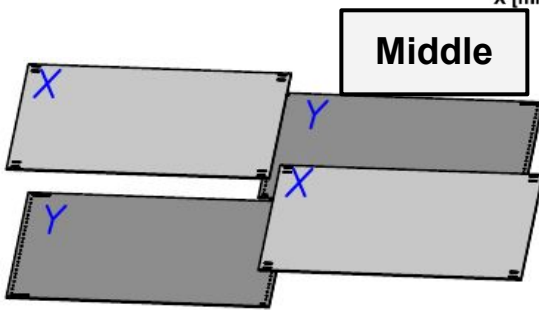
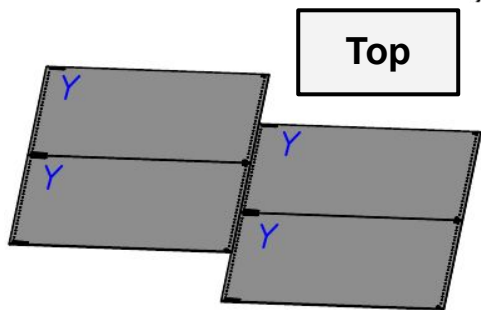
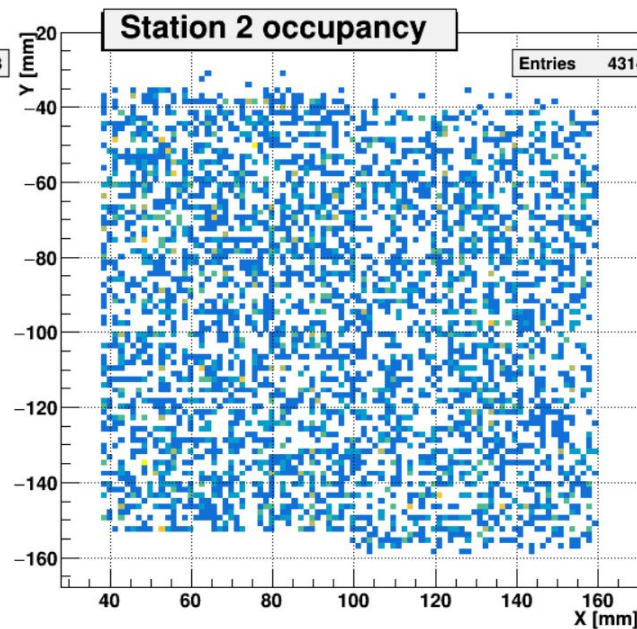
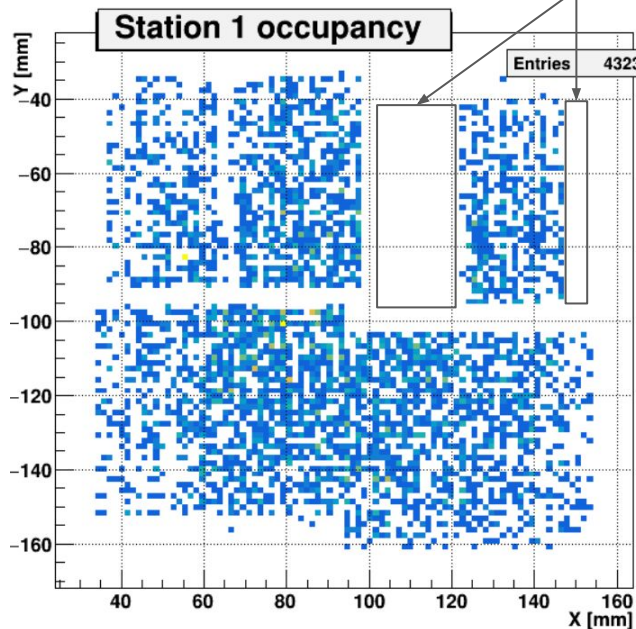


Status of MiniSPD







09.03.2021

Previous occupancies



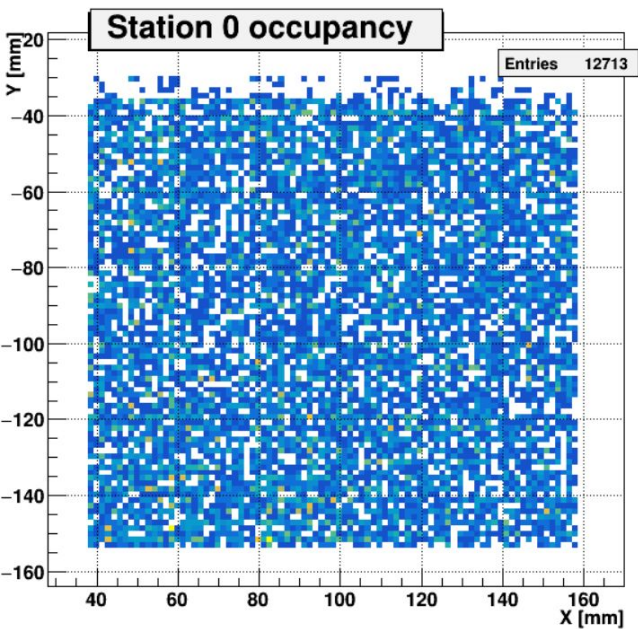


Silicon stations occupancies


Clearance between two halves

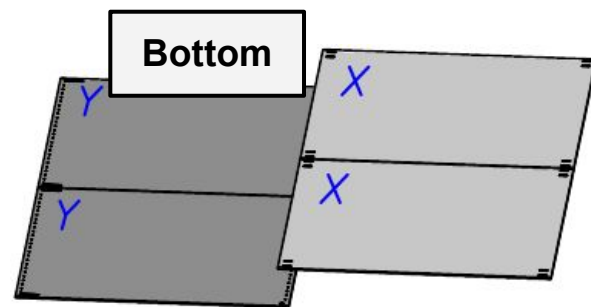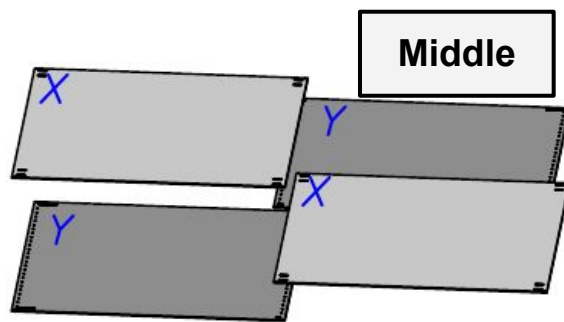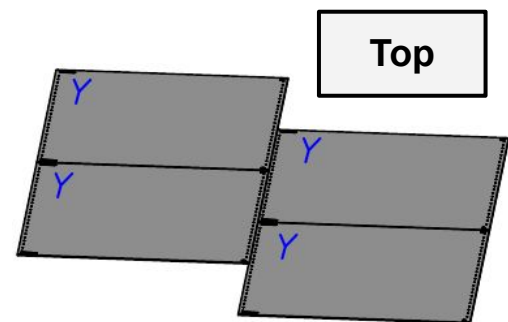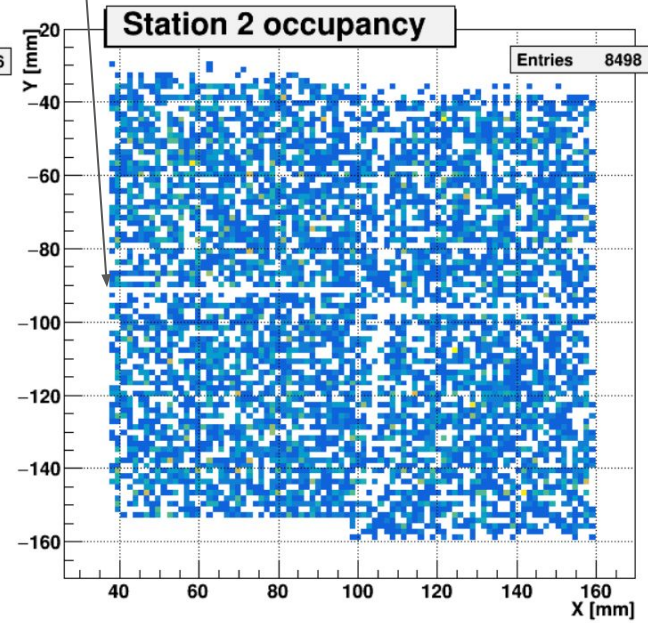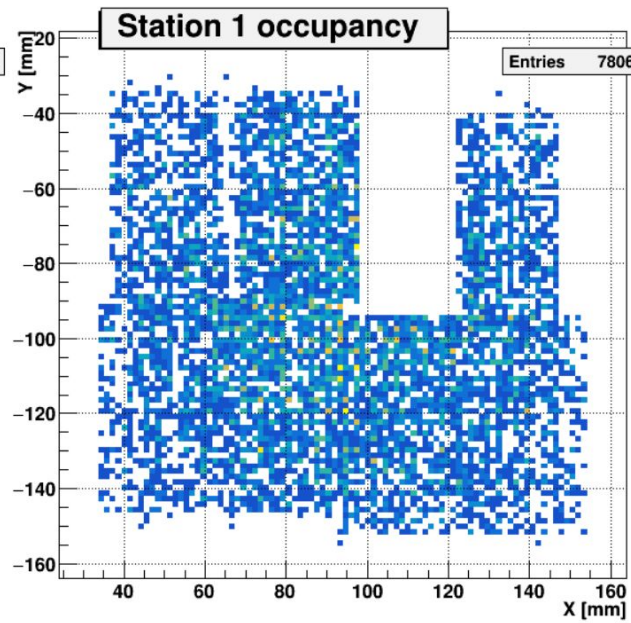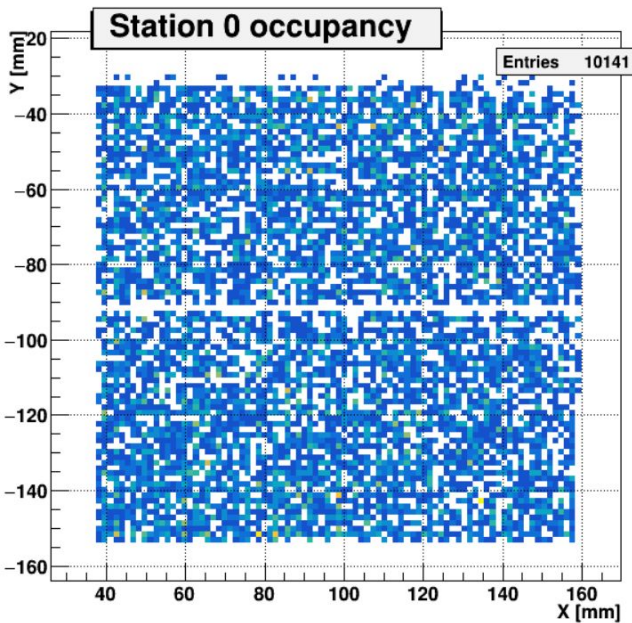

Signal amplitude distribution

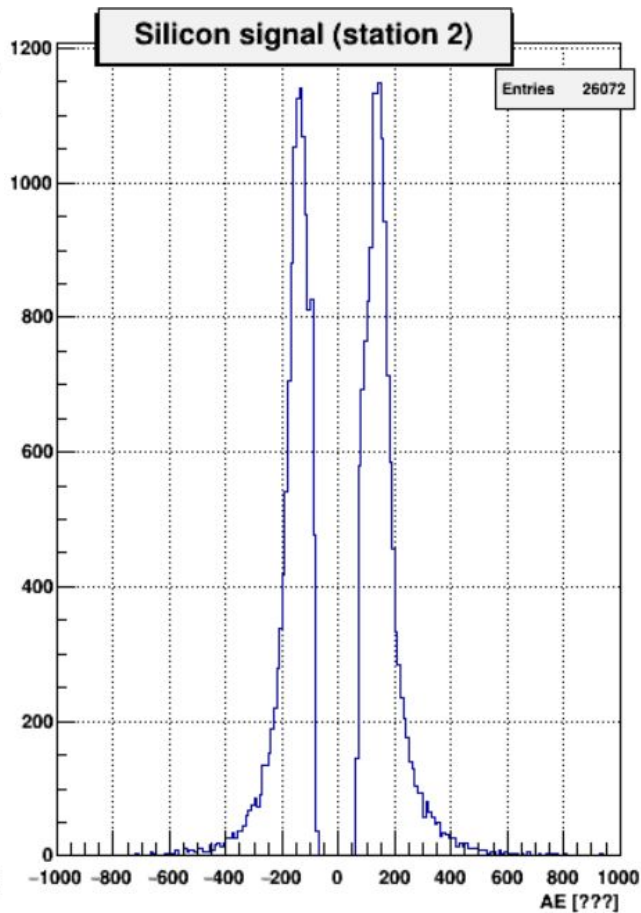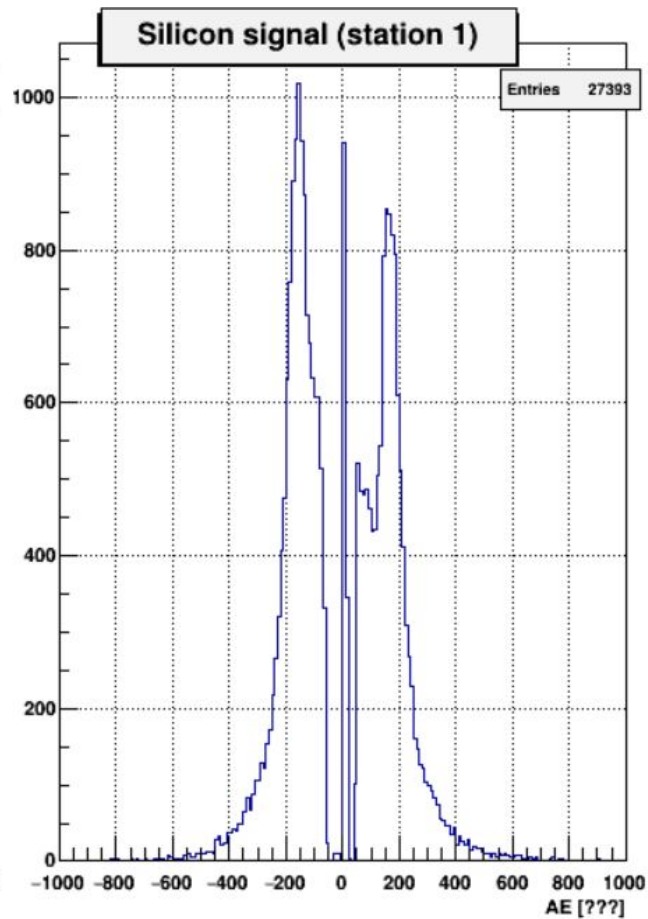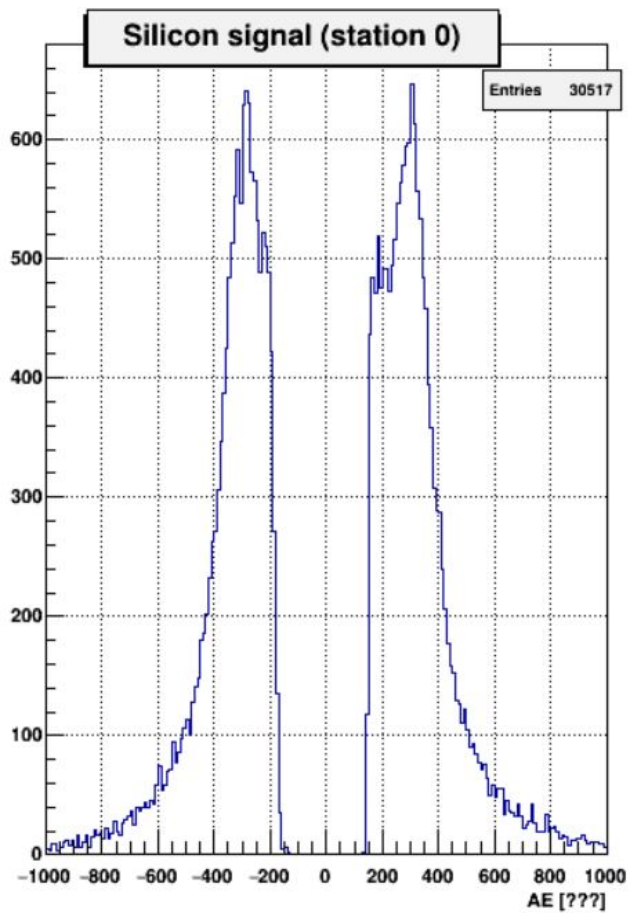


Signal from one strip

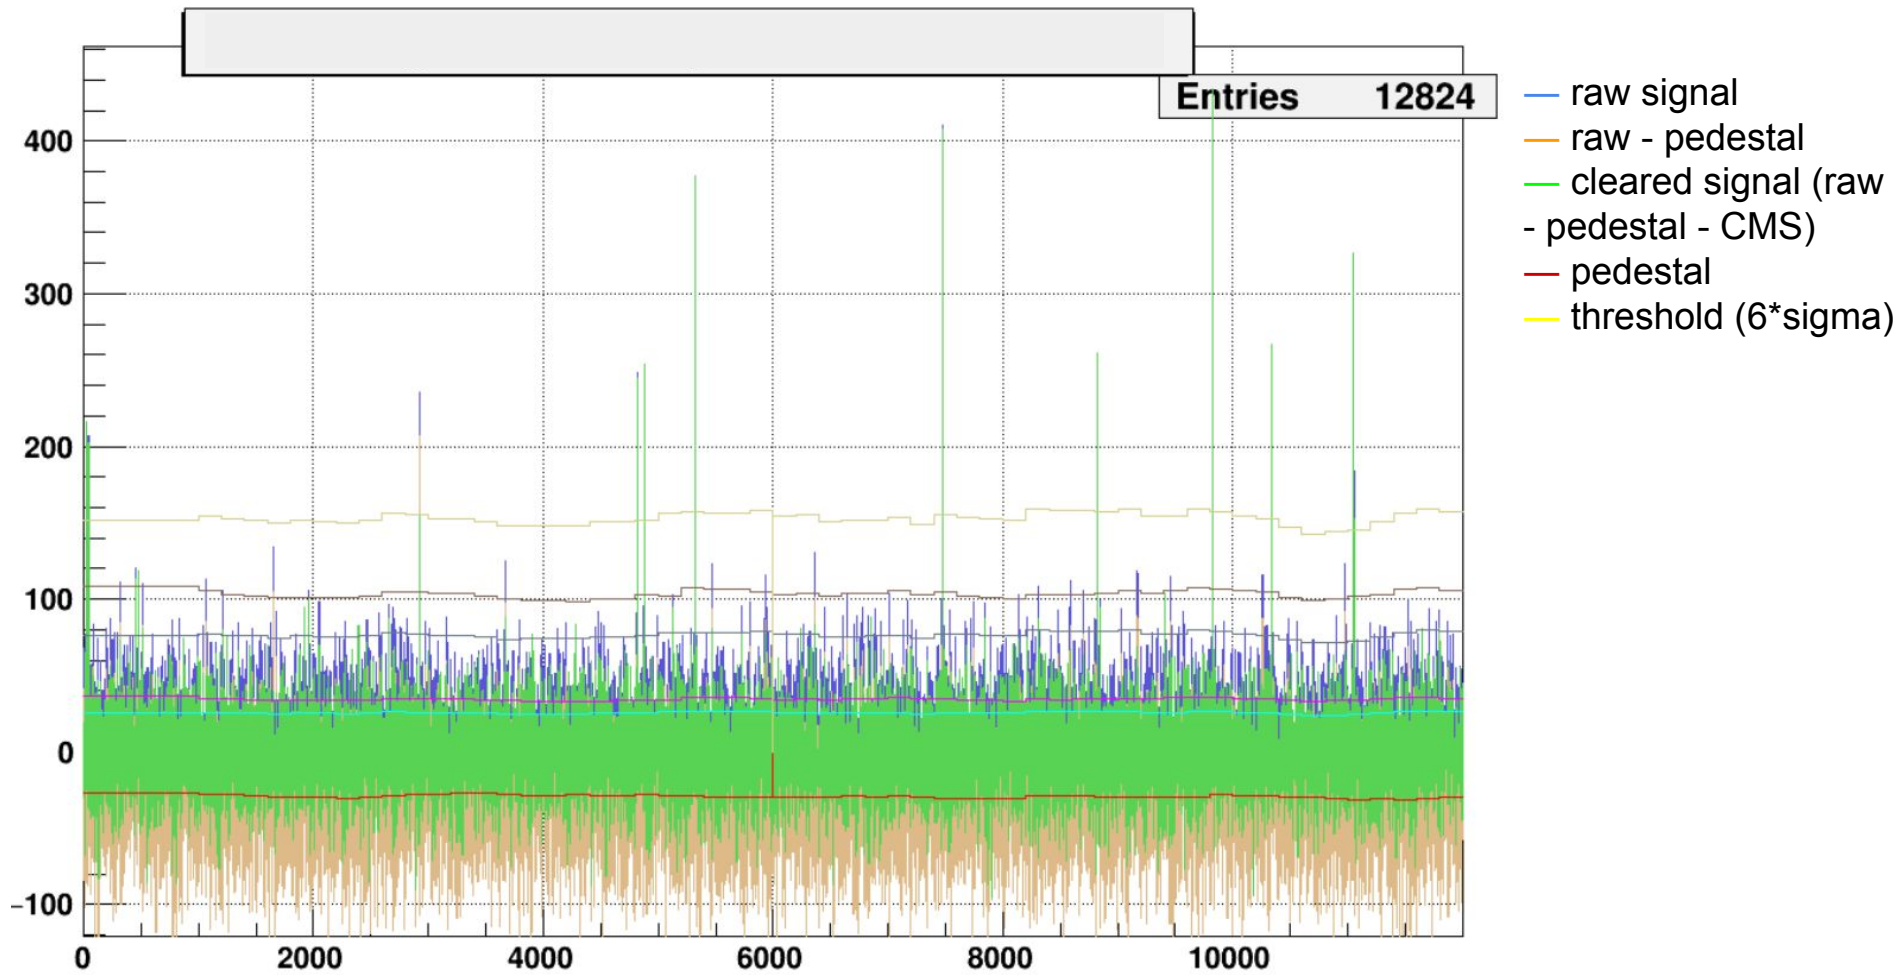

Alignment




Process of alignment will be performed using Millepede II.

Millepede uses least squares algorithm.



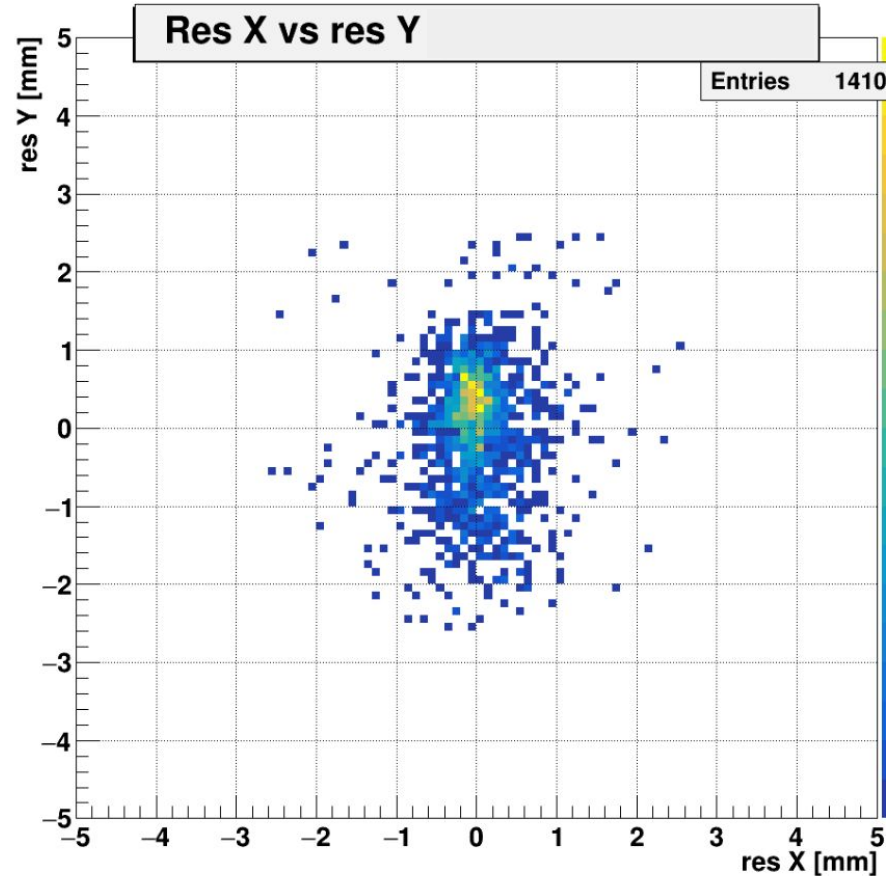


Backups

Residuals on distinct stations

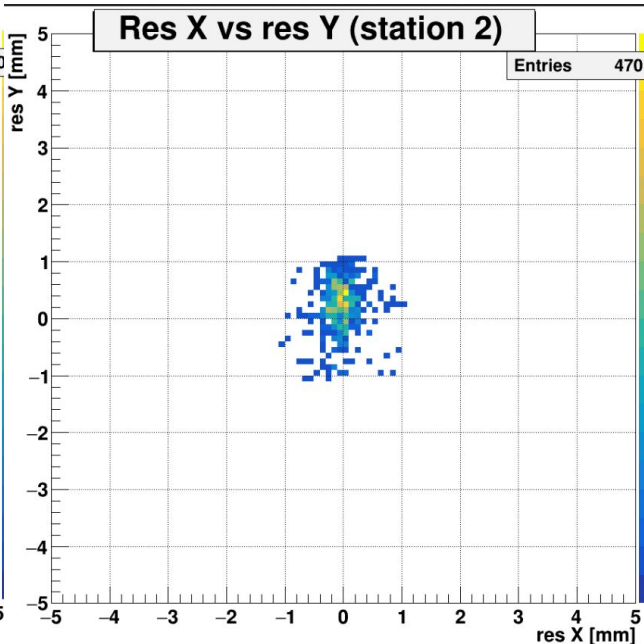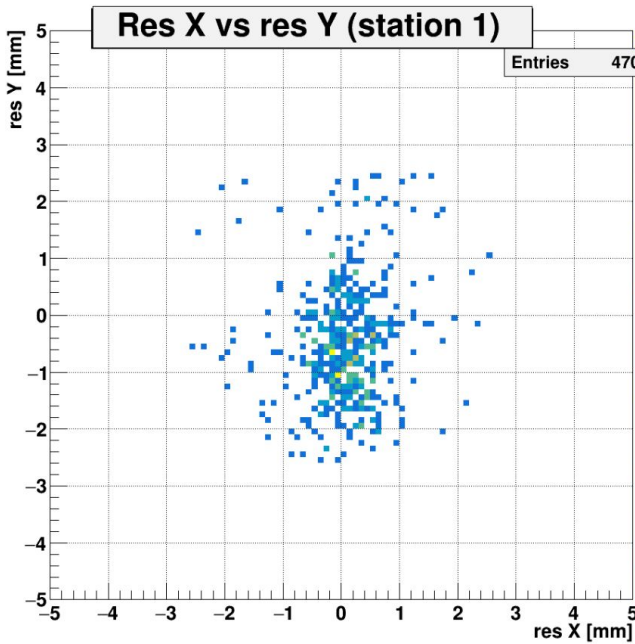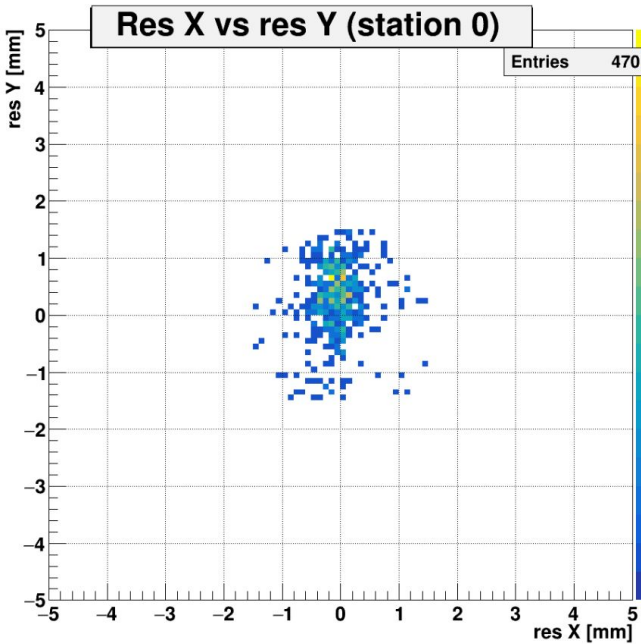

Signal amplitude distribution (absolute value)

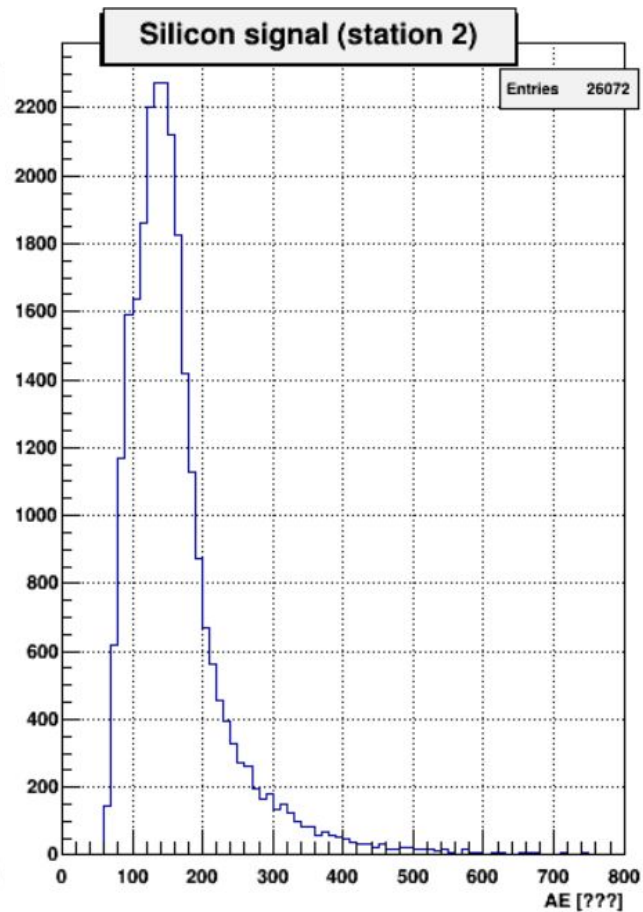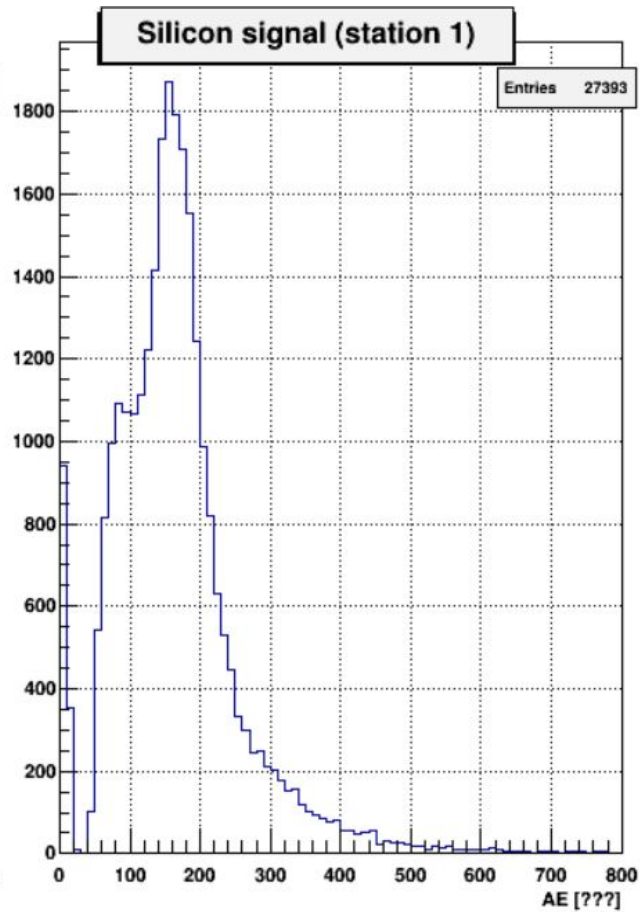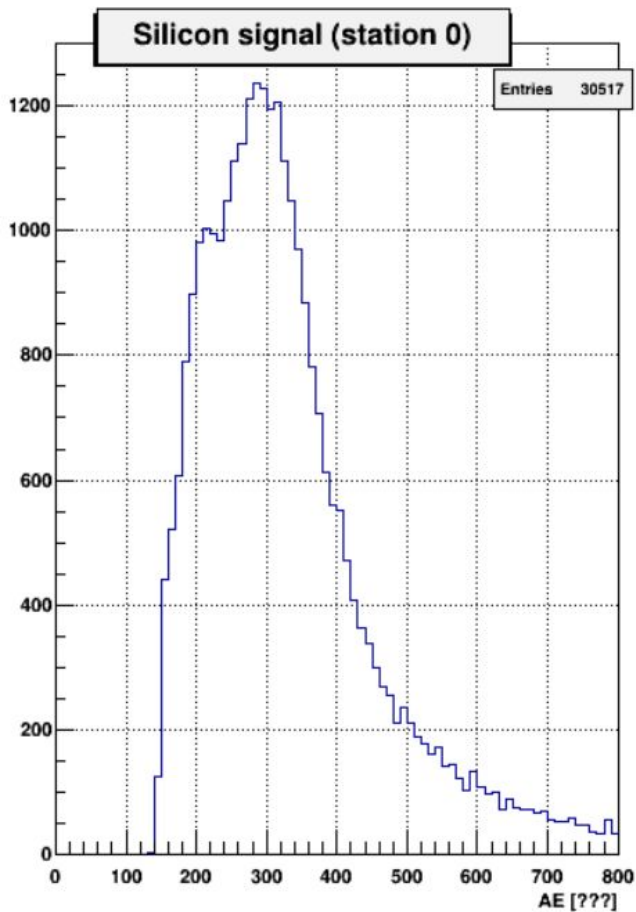

Cut signals

