
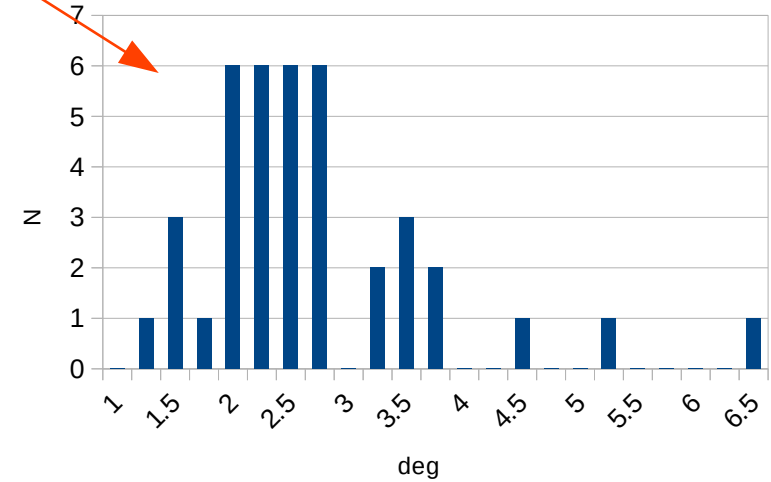


Theta distribution



85° 11' 16"	85,1878	RMS 80,9904	-4,1974
83° 10' 47"	83,1797		-2,1894
81° 49' 42"	81,8283		-0,8380
80° 17' 55"	80,2986		0,6918
79° 6' 35"	79,1097		1,8806
78° 35' 52"	78,5978		2,3926
78° 29' 21"	78,4892		2,5012

84° 2' 4"	84,0344	83,8633	-0,1711	1,2053
83° 35' 52"	83,5978		0,2656	
83° 36' 51"	83,6142		0,2492	
83° 24' 9"	83,4025		0,4608	
83° 44' 43"	83,7453		0,1181	
84° 2' 8"	84,0356		-0,1722	
84° 36' 28"	84,6078		-0,7444	



max-min
6,6986

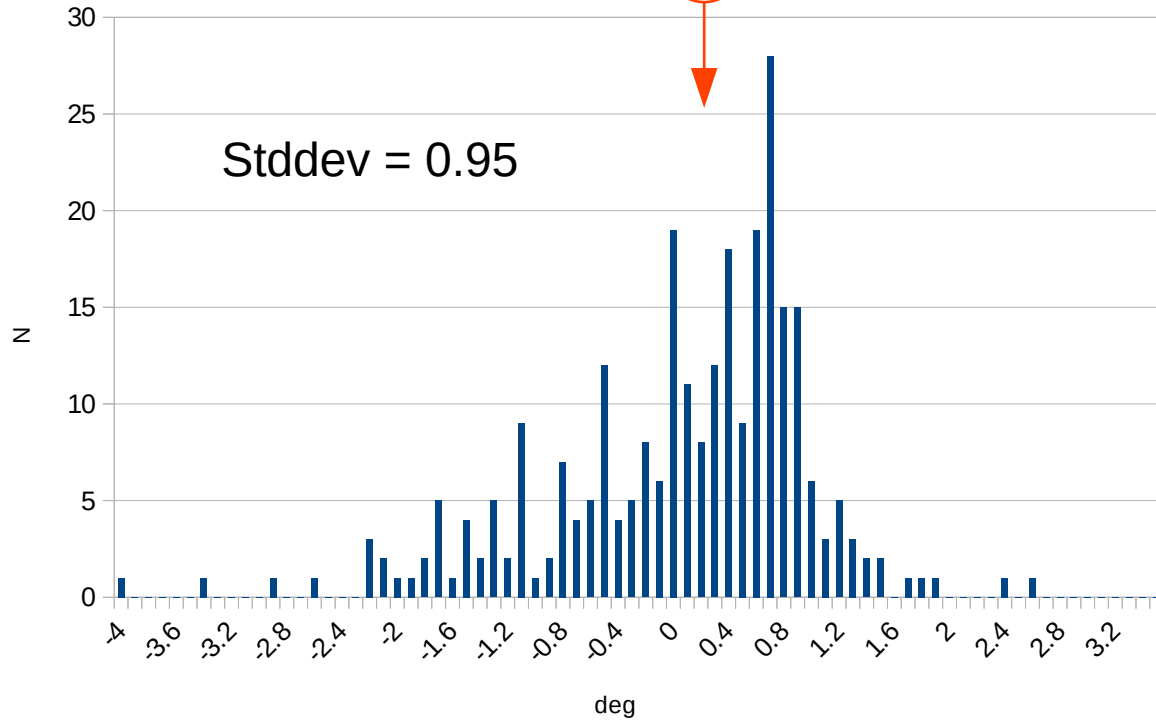


Phi distribution

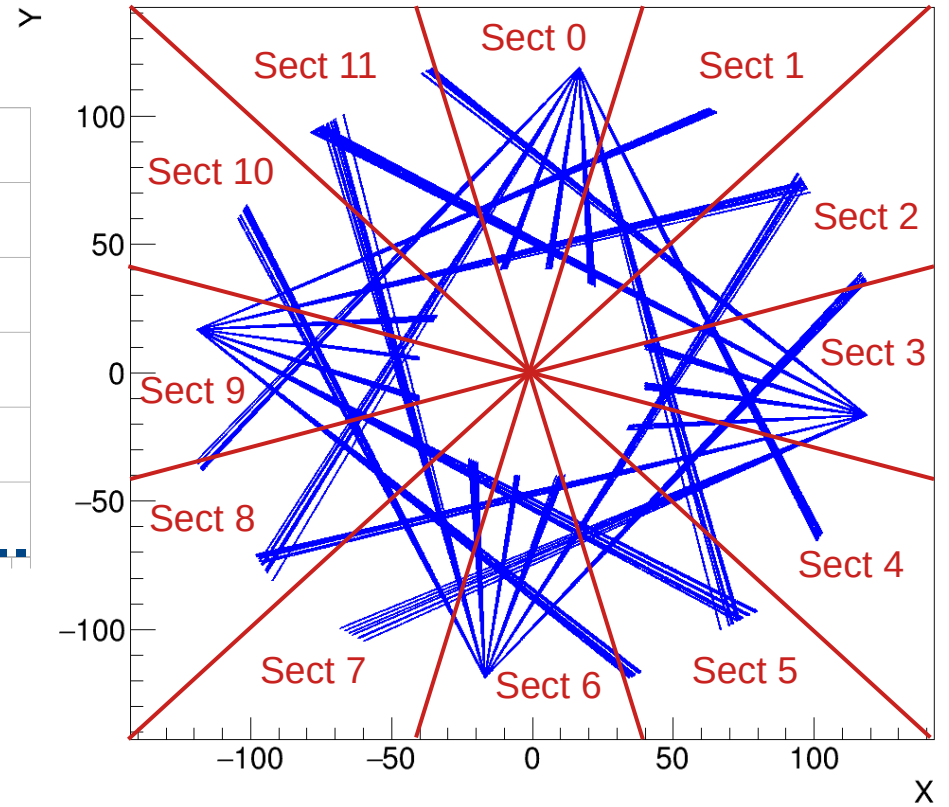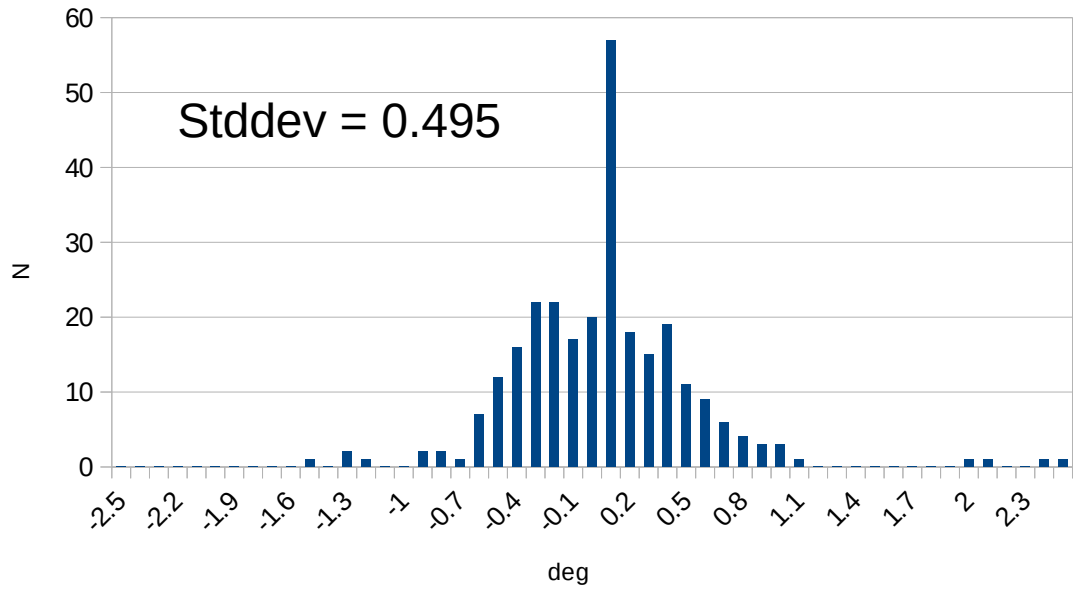

Ideal emitters assembly in tubes

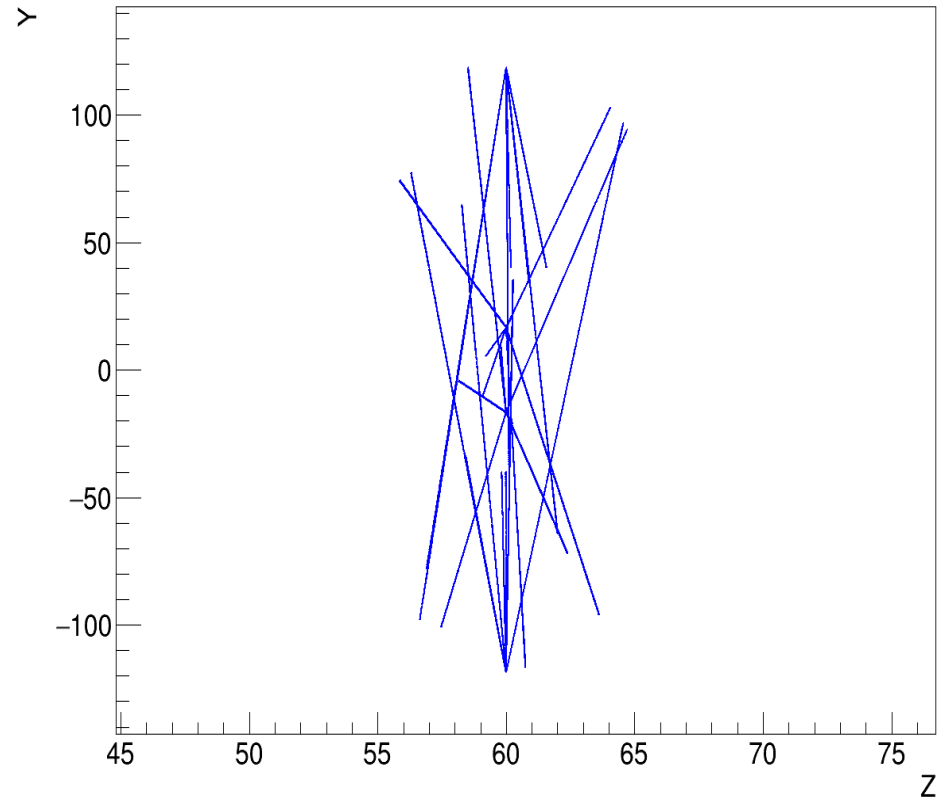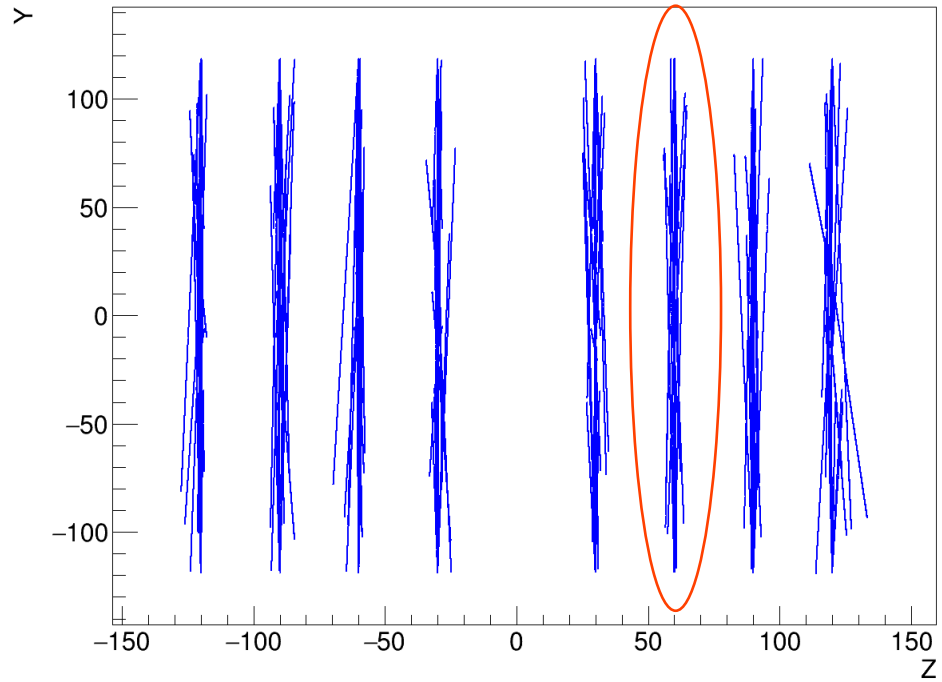

Laser planes expected positions -> {82, 137, 191, 246} bin

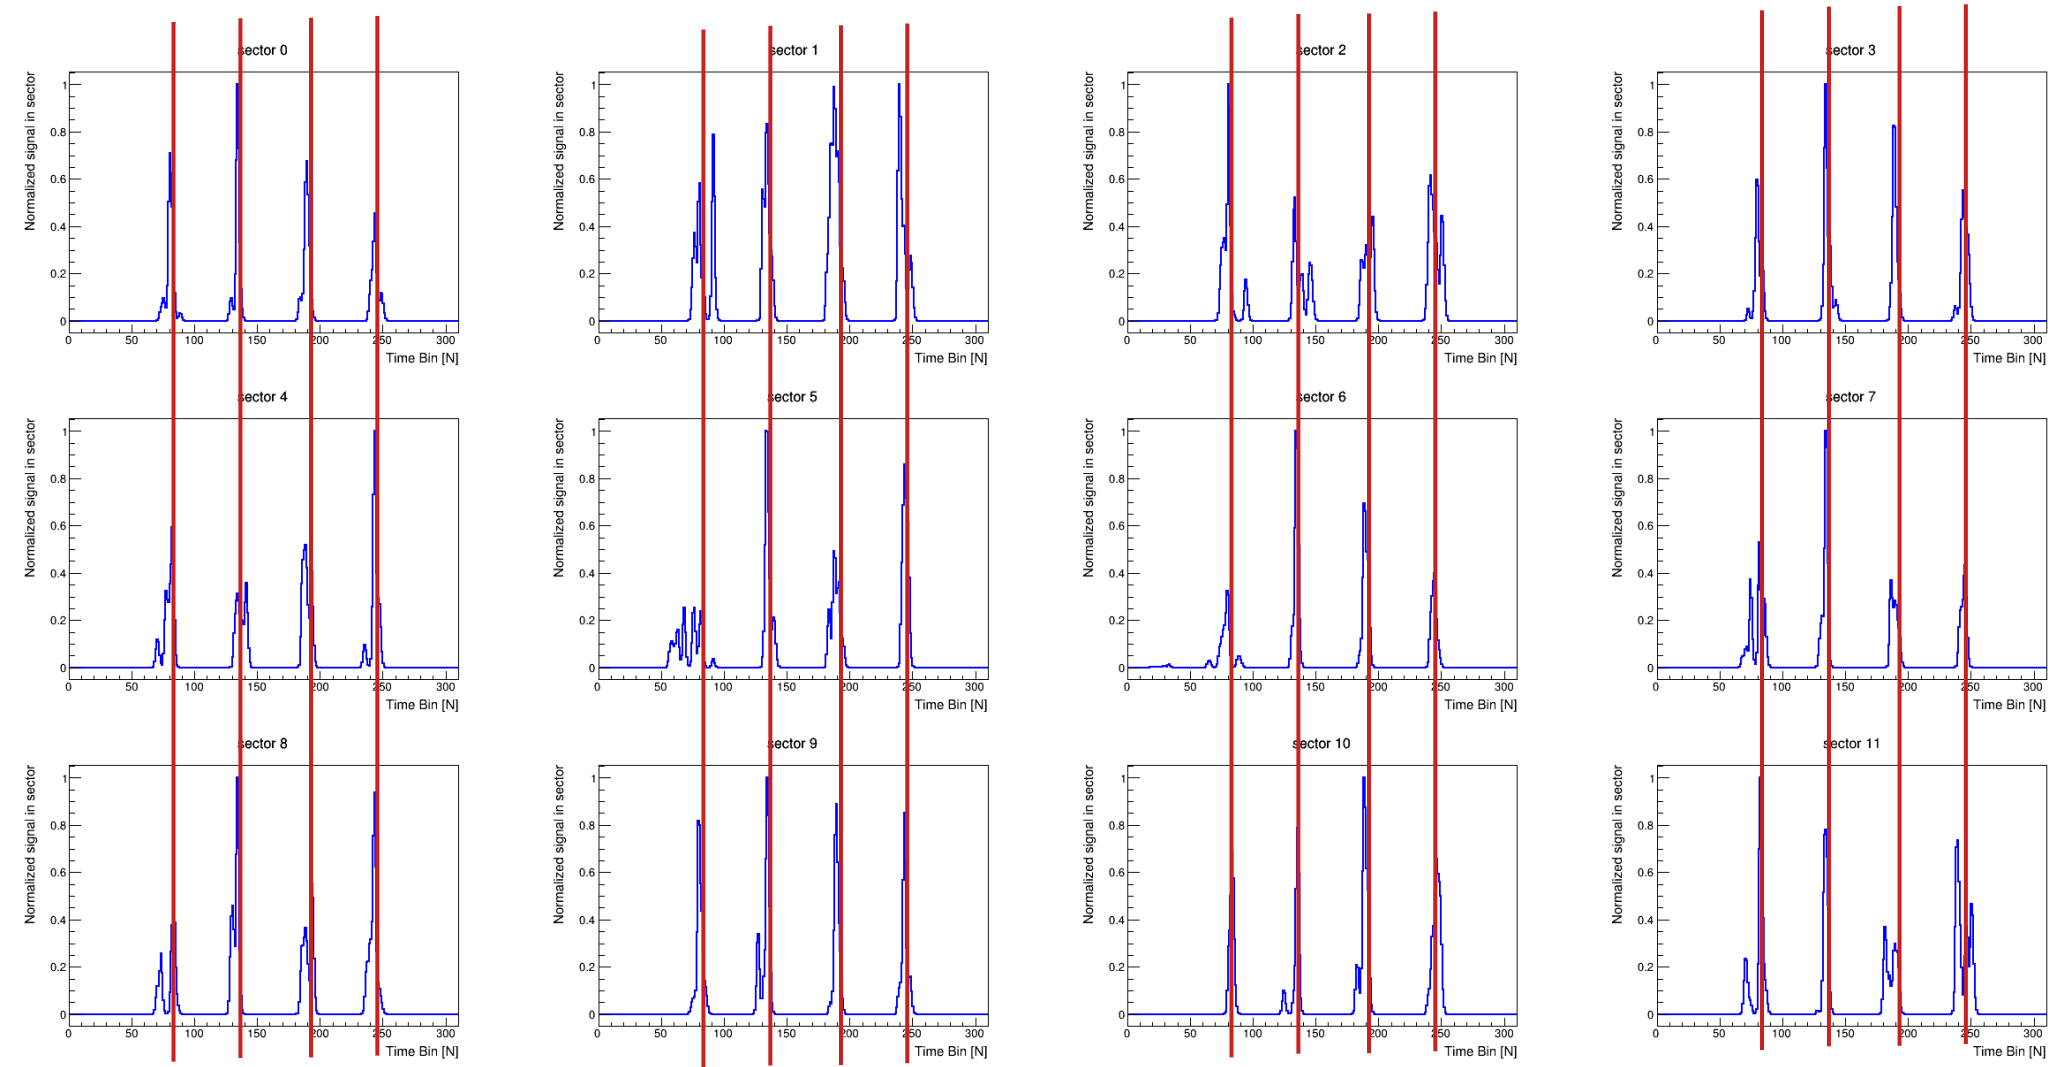

Laser planes expected positions -> {82, 137, 191, 246} bin

