


Computer simulations of six layers MPD ITS performance for D-mesons identification



Kondratev V.
Murin Yu.



300
ЛЕТ СПбГУ

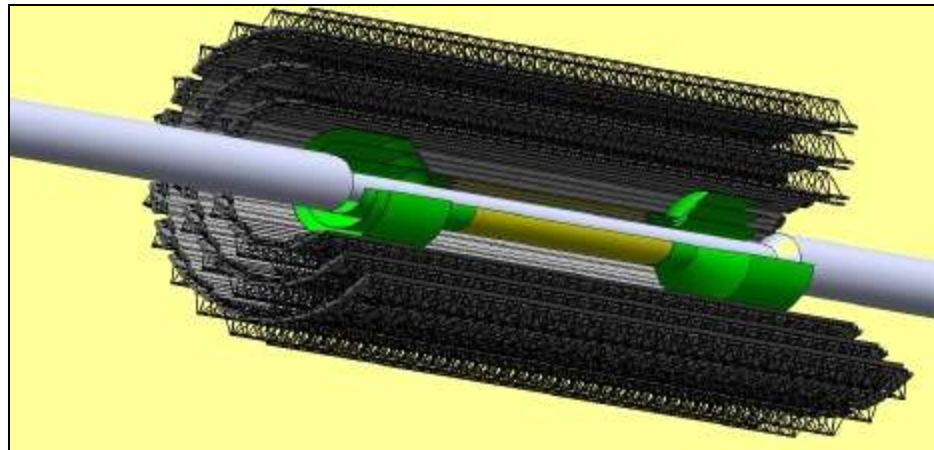

Seminar on the Chinese-Russian Cooperation within the NICA
MPD-ITS Project

Dubna, 23-24 July 2024


Contents

- Introduction
 - Physical motivation of using vertex detectors
- Modeling of the ITS of the MPD setup
 - Geometric layout
 - Pointing resolution
 - Charmed particle reconstruction
- Conclusion

Physical motivation of using ITS

The **yields and spectra of charmed particles** are the important observables sensitive to critical phenomena in phase transitions of the QCD-matter.

Vertex detectors (Inner Tracking System - ITS) are used in HEP experimental setups for highly efficient detection of such **short-lived products** of nuclear interactions.

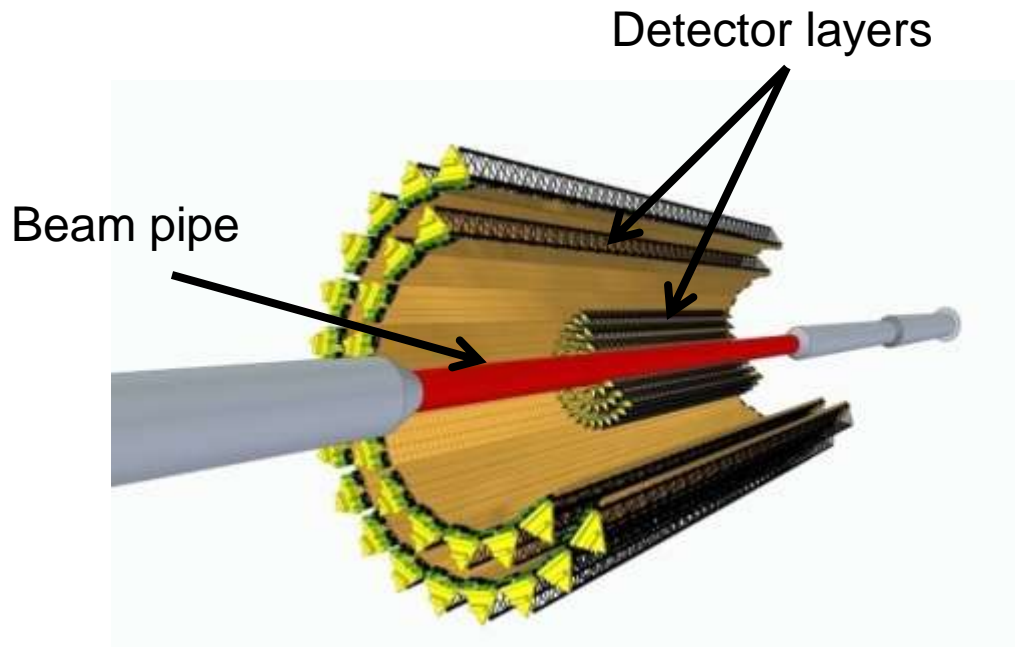

In modern collider experiments ITS is build of several layers of **silicon position-sensitive sensors**, surrounding a beam pipe. This kind of detectors are already used in ALICE , ATLAS, CMS and STAR experiments.


Project ITS of MPD experiment

MPD ITS is planned to be construct of **Monolithic Active Pixel Sensors (MAPS)**

Advantage:

- 1) the best spatial resolution
- 2) high counting rate
- 3) high level of segmentation per pixel.

Combination of the TPC and the MAPS based ITS makes it possible to detect short-lived products of AA interactions with maximum efficiency.

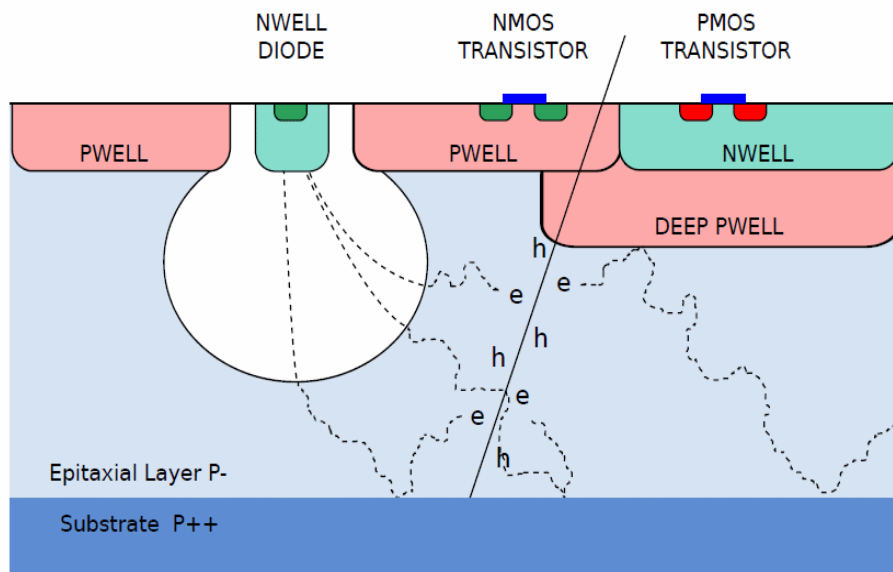

Standard MAPS parameters for the project MPD ITS:

Sensitive area: $15 \times 30 \text{ mm}^2$

Thickness: $50 \mu\text{m}$




Number of pixels: 512×1024

Pixel size: $28 \times 28 \mu\text{m}^2$.

Space resolution:


$$\sigma_{r\phi} = 5 \mu\text{m} , \sigma_z = 5 \mu\text{m}$$

Registration of charmed particles by the vertex detector

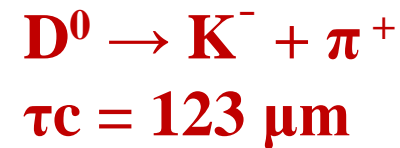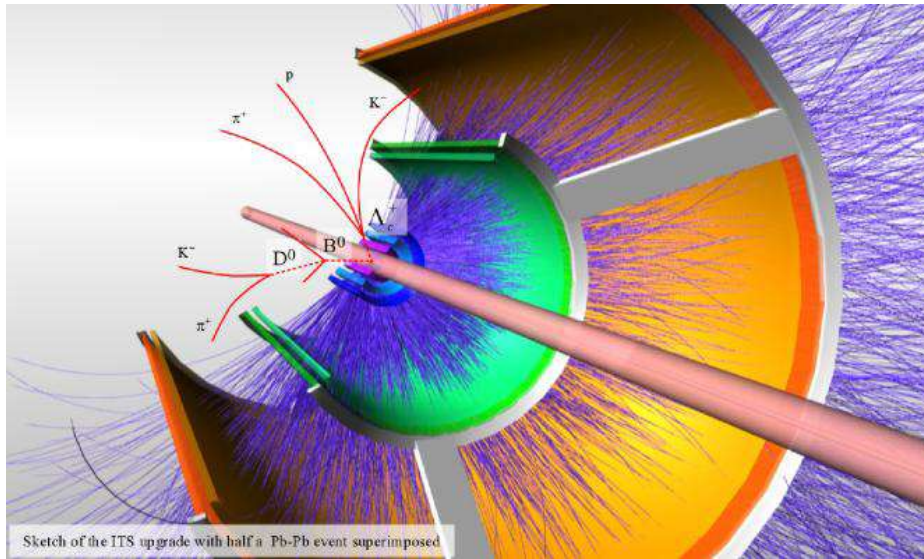

Reliable identification of short-lived **charmed mesons** can be performed by determining the invariant mass of their decay products. So, for high-efficient reconstruction of decay vertices near the interaction point the vertex detectors with **high pointing resolution** are needed.


First project ITS model

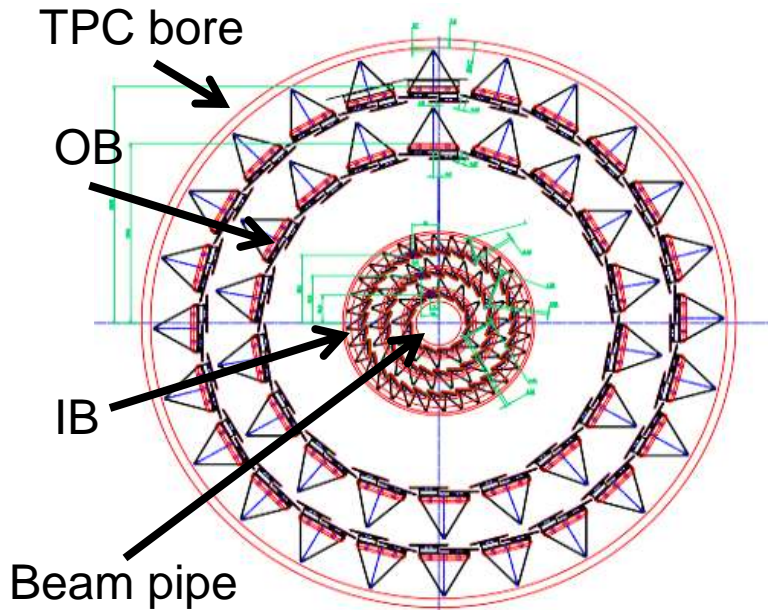

Model ITS-5-40 (basic configuration)
 5-layer ITS for a beam pipe with the smallest possible diameter of **40 mm** with a staggered arrangement of ladders in Outer Barrel (OB) and a fan-like arrangement of ladders in Inner Barrel (IB)

Each layer consists of ladders containing **24 MAPS** in IB and **98 MAPS** in OB

Layer	No of MAPS	R_{\min} , mm	R_{\max} , mm	Length, mm
1	24 * 12	22.4	26.7	750
2	24 * 22	40.7	45.9	750
3	24 * 32	59.8	65.1	750
4	98 * 36	144.5	147.9	1526
5	98 * 48	194.4	197.6	1526




Inner Barrel

Outer Barrel


(2020) Murin Yu., Kondratev V. *et al.* Physics of Particles and Nuclei, 17 (6), pp. 856-870.

ITS pointing resolution

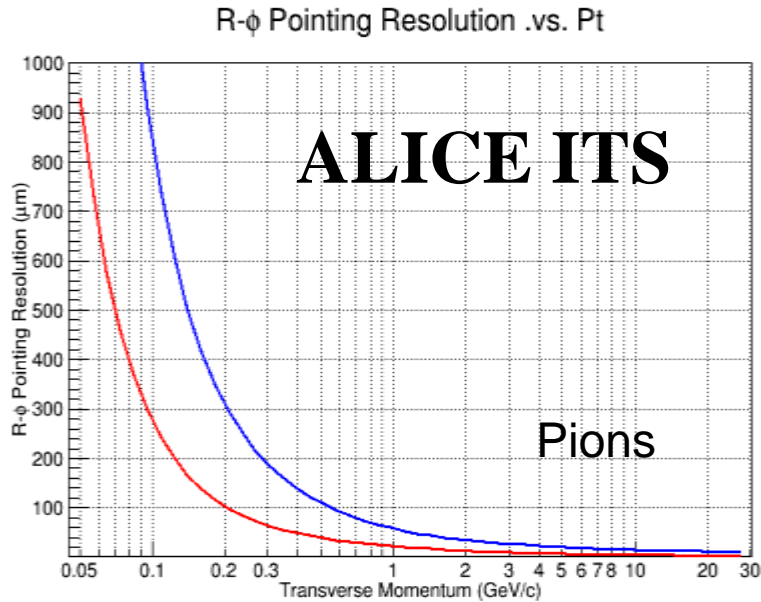

— New ITS2

— Old ITS

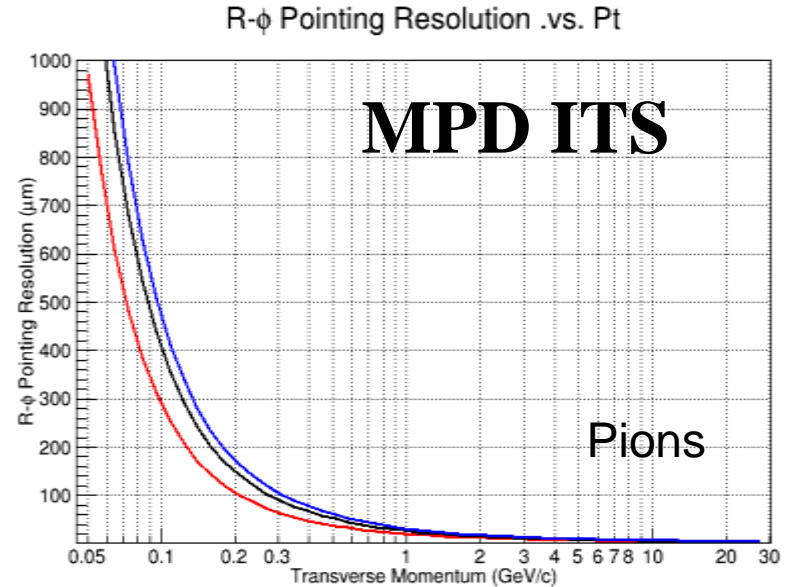

— Beam pipe $\varnothing = 40$ mm



— Beam pipe $\varnothing = 50$ mm

— Beam pipe $\varnothing = 60$ mm

MPD ITS pointing resolution with beam pipe $\varnothing = 40$ mm is comparable with ALICE ITS2.

ITS pointing resolution and D mesons p_T -spectra

The ITS pointing resolution was evaluated for π , K and p tracks as a function of P_t

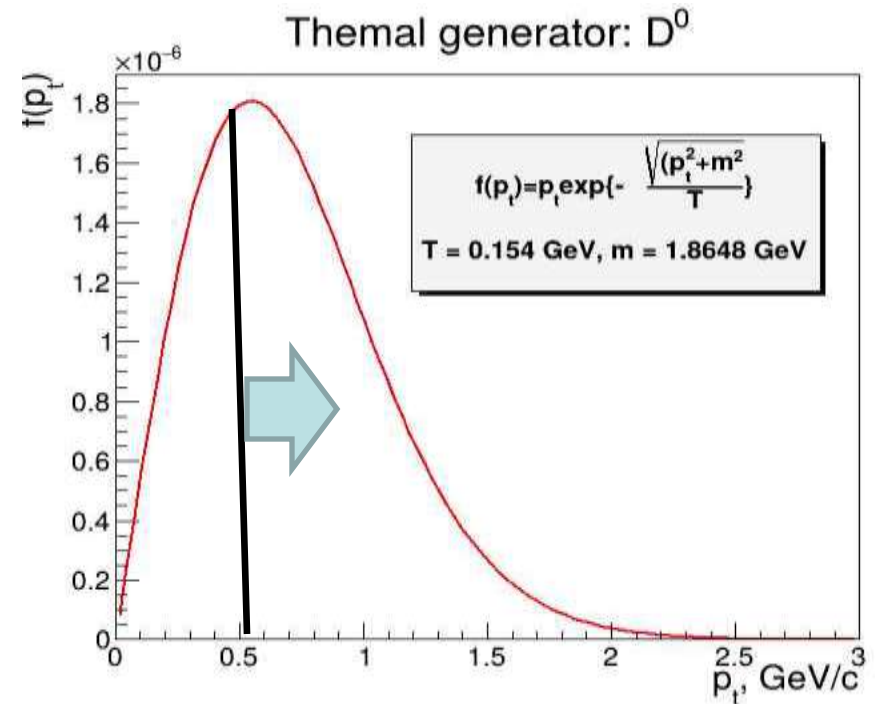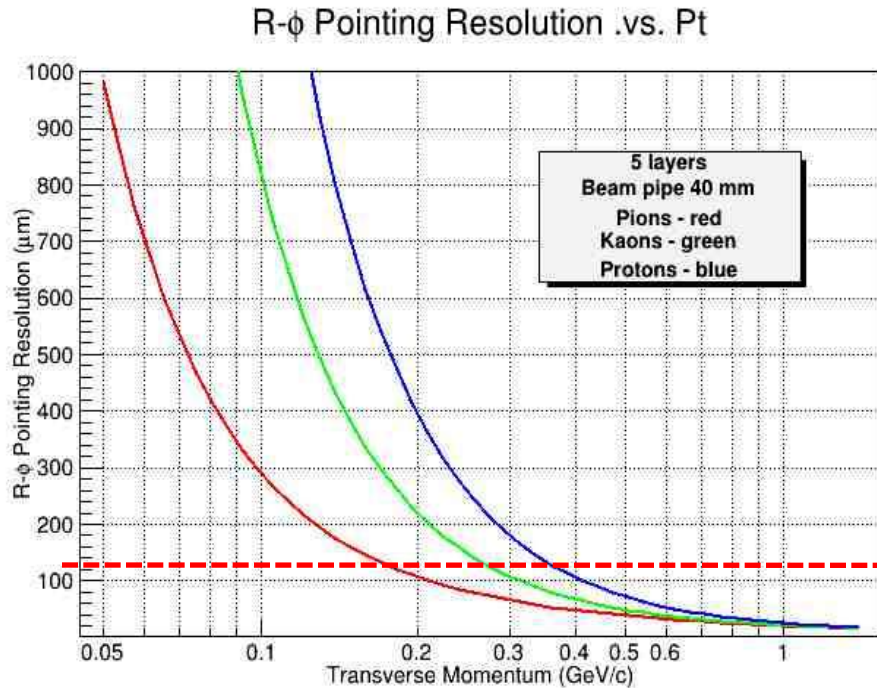


For example, ITS pointing resolution of at least **120 $m\mu$** makes it possible a decay vertex reconstruction of D^0 mesons in the channel $D^0 \rightarrow K^- + \pi^+$ ($c\tau = 123 \mu\text{m}$) with p_T above **500 MeV/c** .

New model of the MPD ITS

5 layers

6 layers

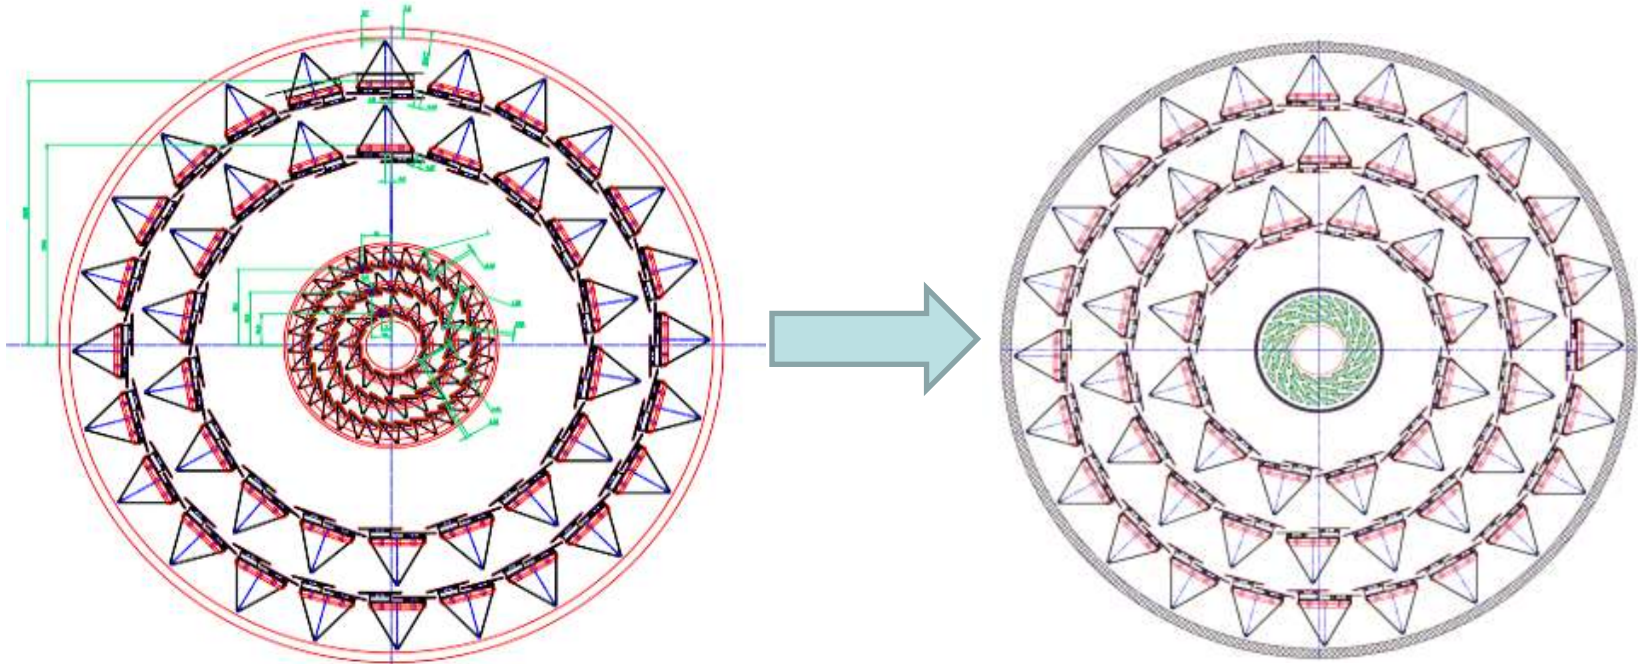


The next step was to add the third outer layer in order to improve the quality of track reconstruction in the whole ITS.

MPD ITS TDR (in preparation)

Geometric model of 6 layer ITS used for simulation

OB - 3 layers of ALPIDE-like MAPS ($15 \times 30 \text{ mm}^2$) with effective thickness of $700 \text{ }\mu\text{m}$


IB - 3 layers of ALPIDE-like MAPS ($15 \times 30 \text{ mm}^2$) with effective thickness of $50 \text{ }\mu\text{m}$

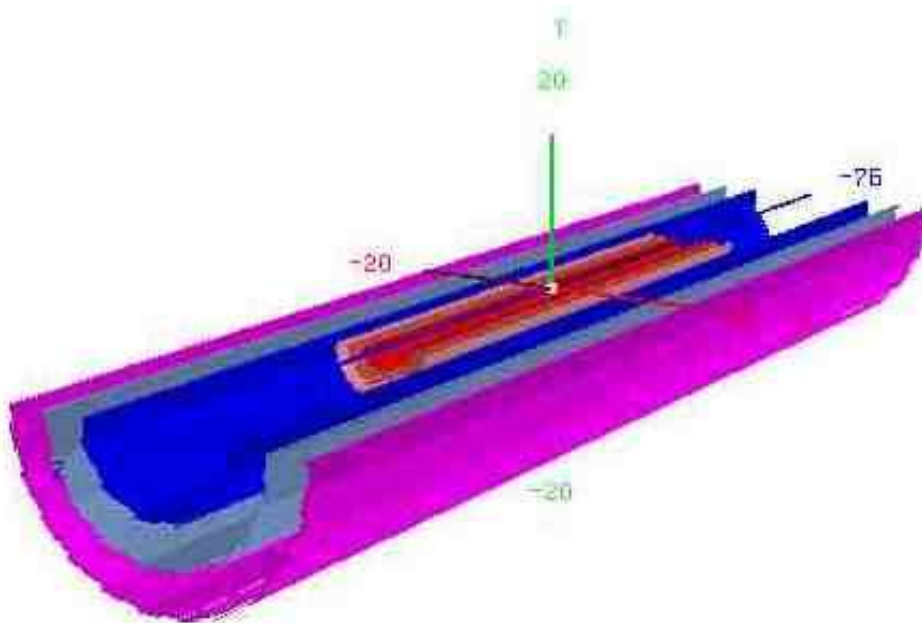

Layer	R_{\min} , mm	R_{\max} , mm	Length, mm
1	22.4	26.7	750
2	40.7	45.9	750
3	59.8	65.1	750
4	93.2	96.7	1526
5	144.5	147.9	1526
6	194.4	197.6	1526

Beam pipe diameter – 40 mm

ITS Monte-Carlo simulation scheme within MpdRoot

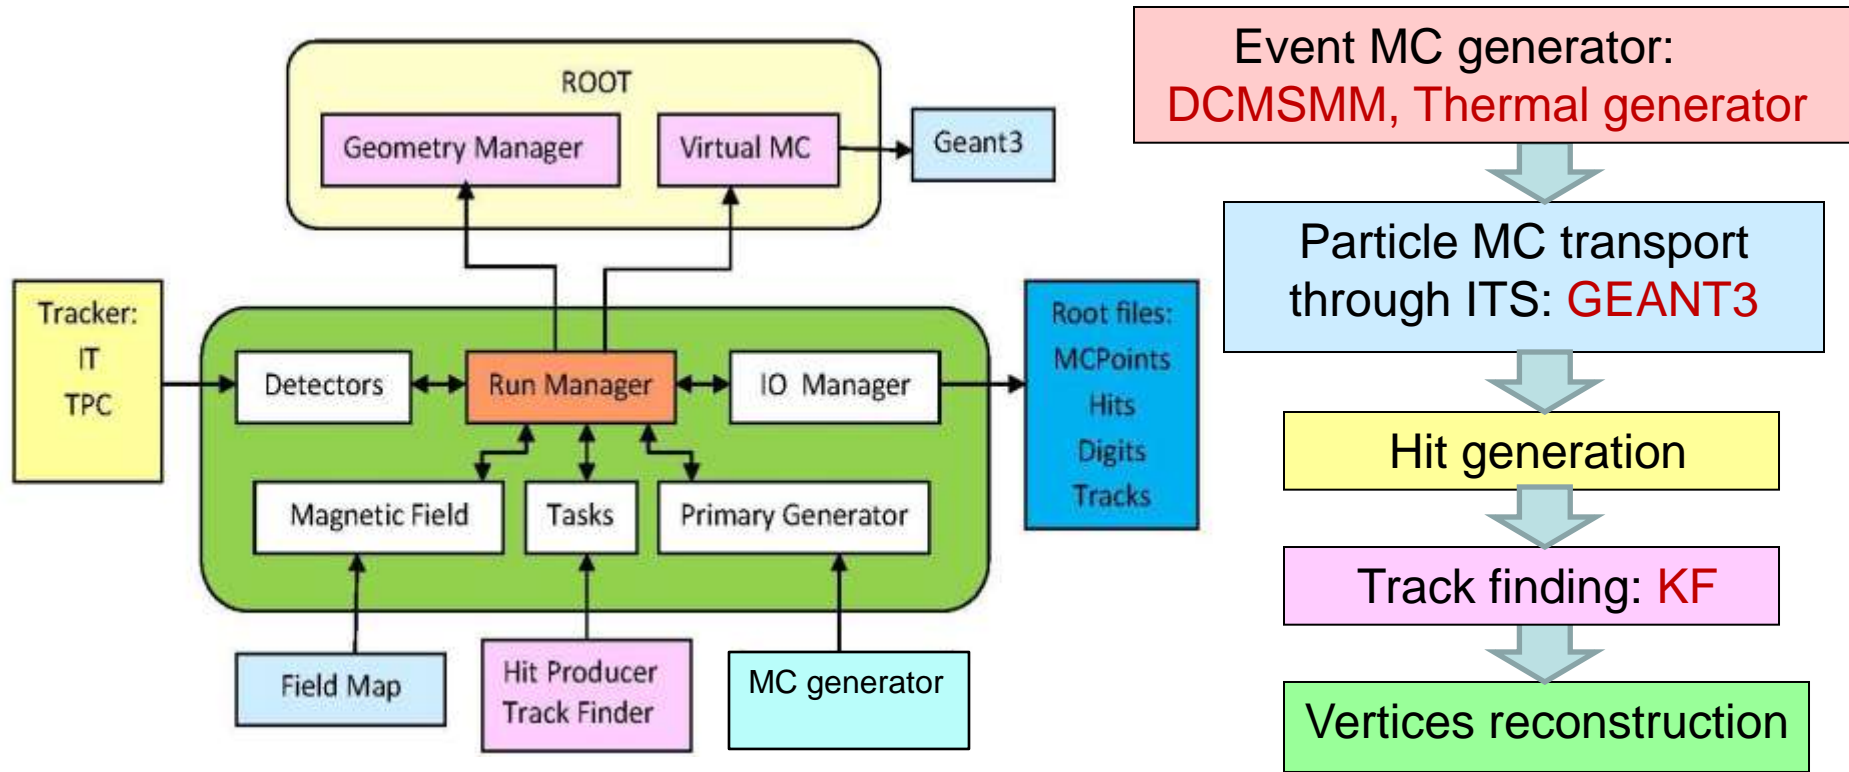

The main simulation tasks include:



- generation of detector responses (**Hit Producer**);
- reconstruction of particle tracks using generated hits (**Track Finder + Track Fitter**);
- reconstruction of the primary and secondary interaction vertices (**Track Analysis**).

Detection of D mesons in central AA collisions with ITS-6-40

Particle	Mass [MeV/c ²]	Mean path $c\tau$ [mm]	Decay channel	BR	Multiplicity
D ⁺	1869.6	0.312	$\pi^+ + \pi^+ + K^-$	9.13%	10 ⁻²
D ⁰	1864.8	0.123	$\pi^+ + K^-$	3.89%	10 ⁻²
D _s ⁺	1968.5	0.150	$\pi^+ + K^+ + K^-$	5.50%	10 ⁻²

Simulation methods

Method of mixed events

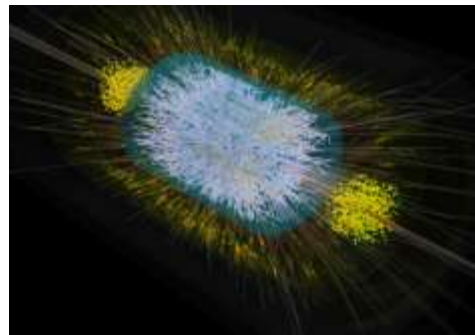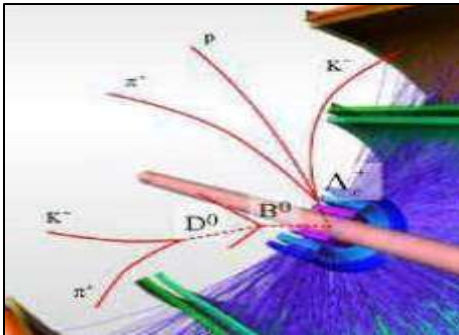

- 1) Track finder:
KF
- 2) Particle identification:
TOF + dE/dx
- 3) Track analysis:
ML (MVA)

Signal (D decay)

Generator: TG
Statistics: 1M decays

Background (Bi+Bi)



Generator: DCMSMM
Statistics: 500K mb events

Track reconstruction method

Kalman Filter

Linear recursive method for track parameters estimation according to known hit measurements m_k that describes track candidate by its state vector and error matrix. The arbitrary noise caused by multiple scattering of the particle in the detector material is taken into account by adding a noise covariance matrix Q_k


TPC seed tracks are extrapolated to ITS layer by layer

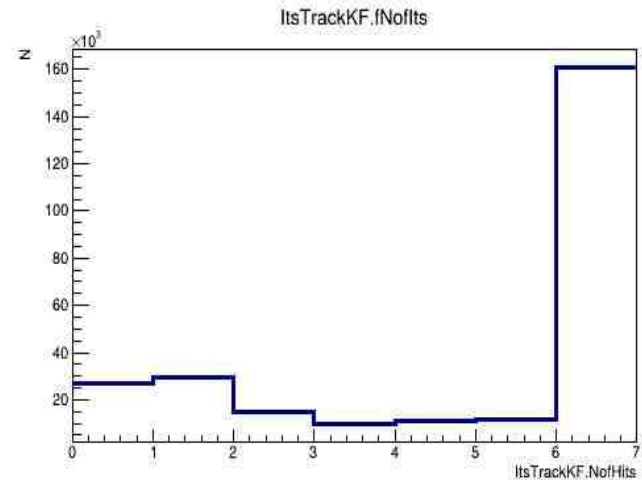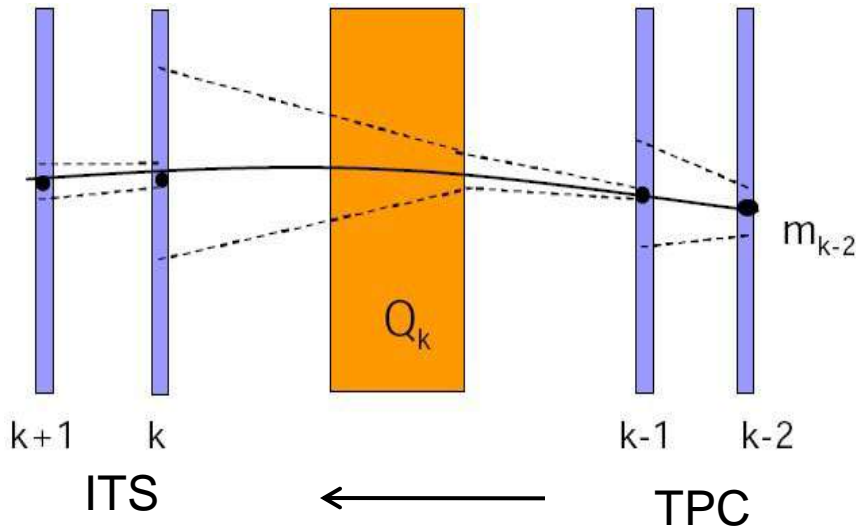

D-meson selection method

Selection parameters are dictated by the decay topology:

- distances of closest approach to the collision vertex ($DCA_{\pi, K}$)
- two-track separation $DCA_{\pi K}$
- decay path λ_D
- pointing angle θ_D

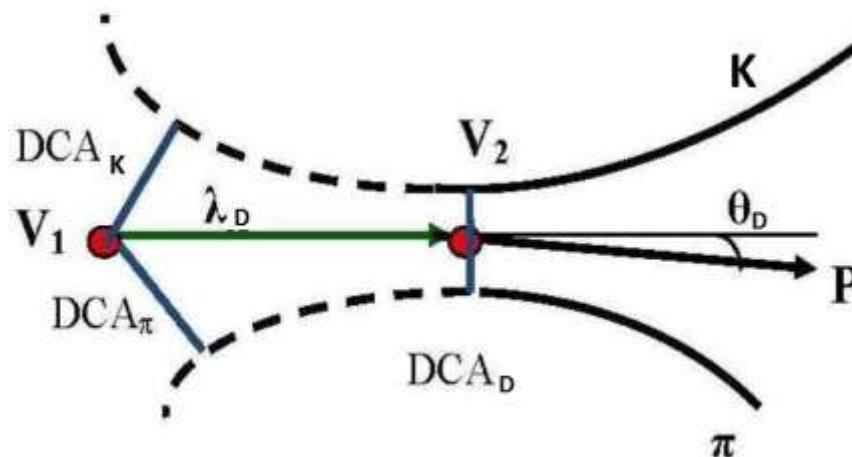



MVA method

The variables from the signal and background samples are trained according to the chosen classifier. During the classification the initial \mathbf{N} input variables \mathbf{V} are transformed to one dimensional variable $\mathbf{R} : \mathbf{V}^N \rightarrow \mathbf{R}$

The resulting cut of the classifier response \mathbf{R} is applied to the data to be analyzed.



The classifier **BDT** (Boosted Decision Trees) has been chosen for the analysis phase when reconstructing D mesons

Reconstruction of D^+ with ITS-6-40 model

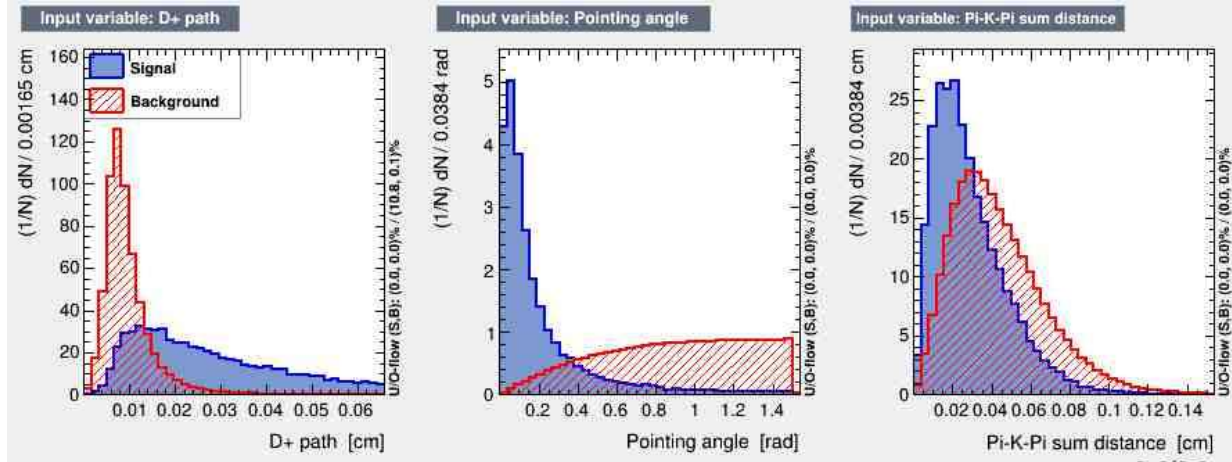


MVA input:
 λ_D (D^+ path),
 θ_D (pointing angle),
 DCA_D (π -K- π sum distance)

MVA cuts:
 $DCA(\pi, K) > 0.015$ cm,
 $BDT_response > 0.35$

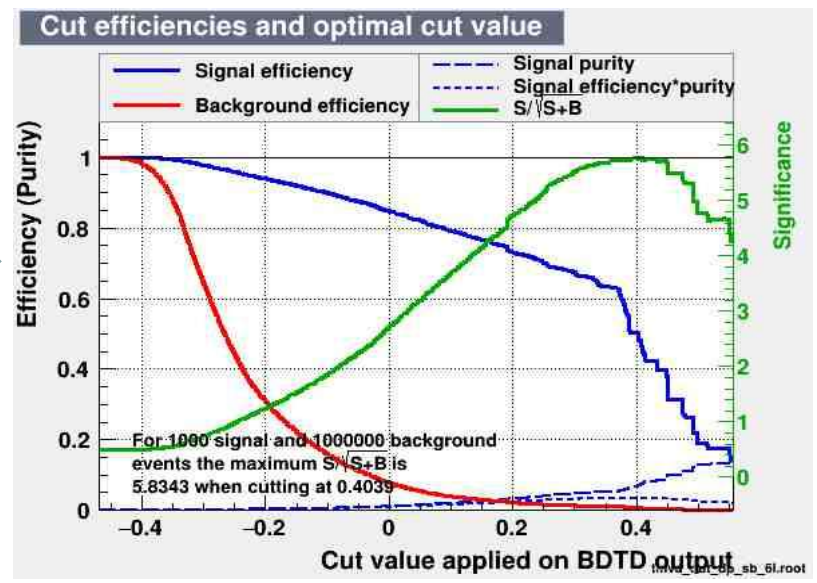
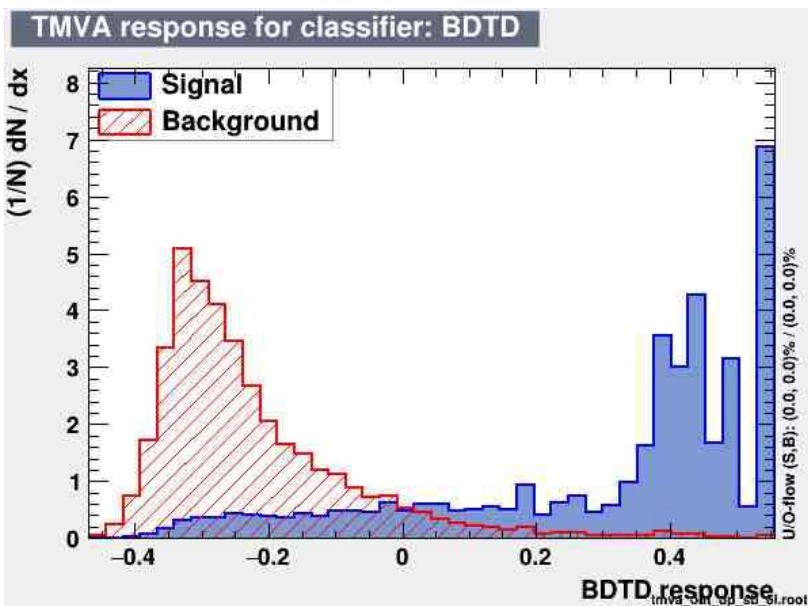


Reconstruction of D^0 with ITS-6-40 model



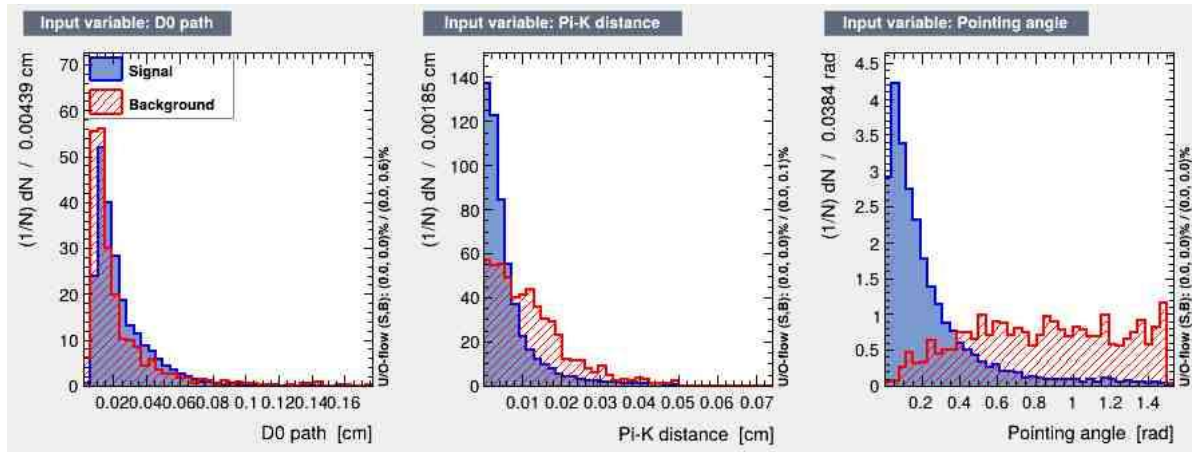


MVA input:
 λ_D (D^0 path),
 θ_D (pointing angle),
 DCA_D (π -K distance)

MVA cuts:
 $DCA(\pi, K) > 0.007$ cm,
 $BDT_response > 0.40$

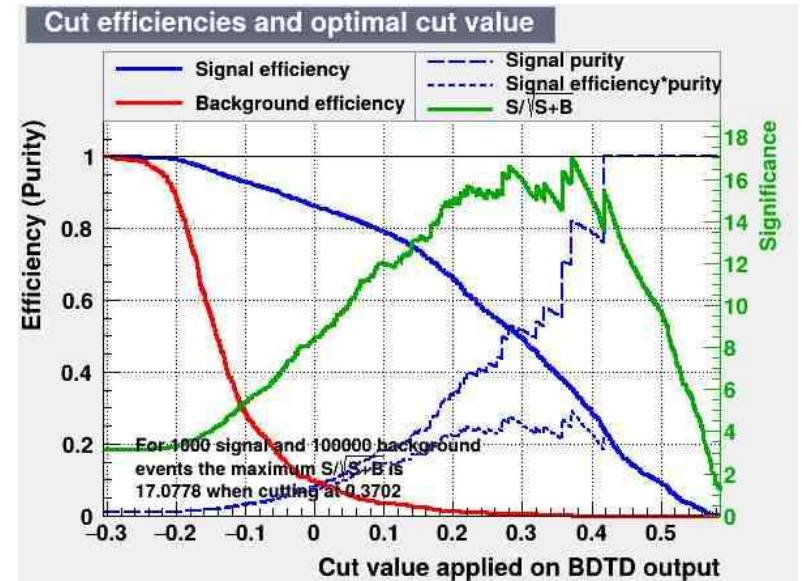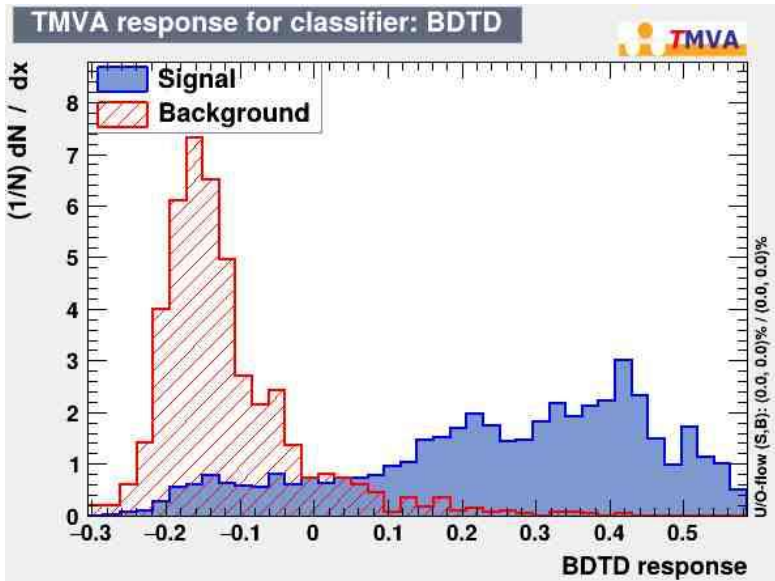

D mesons reconstruction in Bi+Bi at $\sqrt{s_{NN}} = 11$ GeV

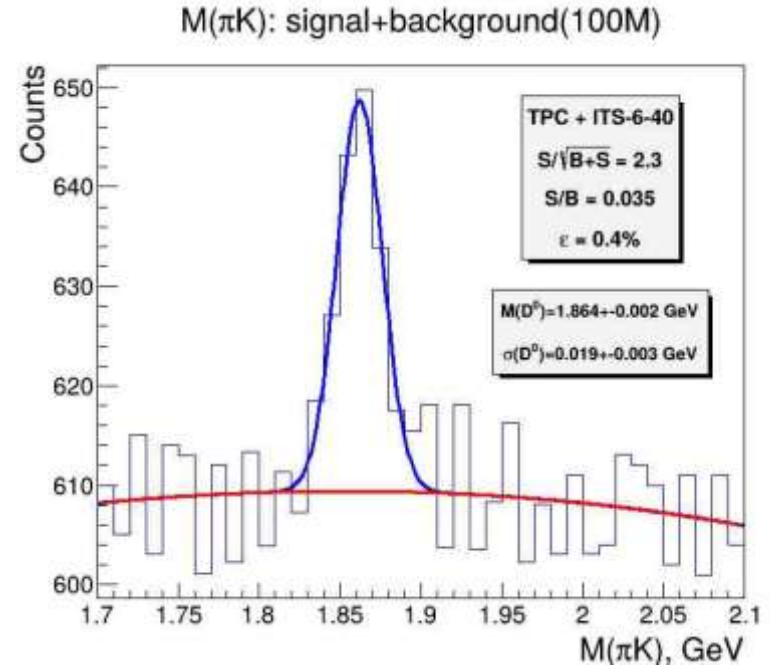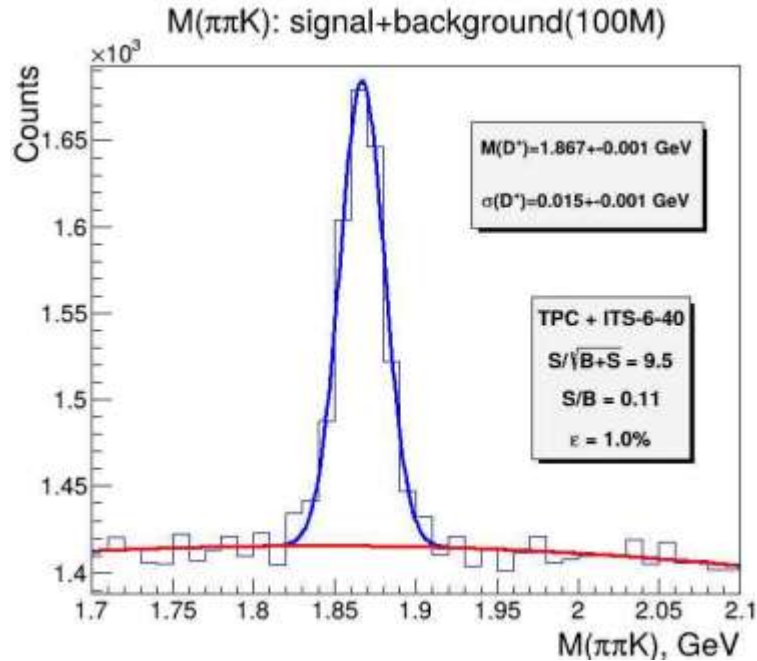


Using the optimal BDT cut allows to reconstruct D^+ and D^0 with an efficiency of **1.0%** and **0.4%** respectively.

$N_D = 19\,000$ mesons/month for $D^+ \rightarrow \pi^+ \pi^+ K^-$
 $N_D = 3\,200$ mesons/month for $D^0 \rightarrow K^- \pi^+$

Particle	D^+	D^0
Efficiency, %	1.0	0.4
Significance	9.5	2.3
S/B(2σ) ratio	0.11	0.035


New concept of 6 layers ITS on the base of MAPS with large area

5 layers of standard MAPS

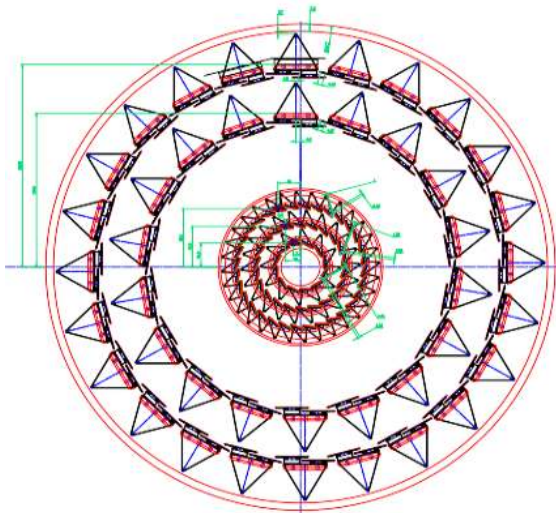


Beam pipe diameter – 40 mm

6 layers of standard MAPS

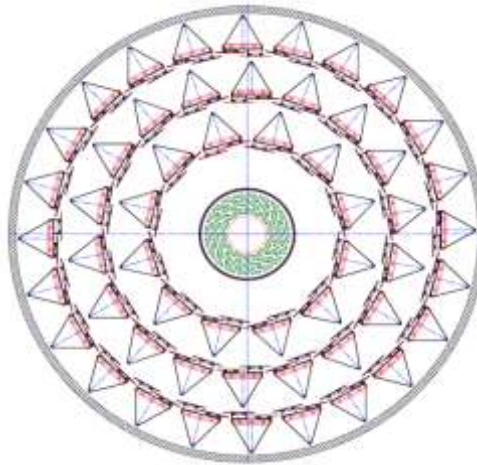

6 layers of MAPS with large area

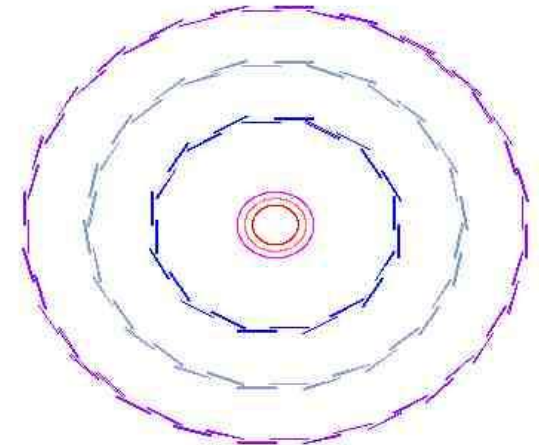

Beam pipe diameter – 35 mm

1. V.I. Zhrebchevsky, V.P. Kondratiev, N.A. Maltsev, Yu.A. Murin, V.V. Petrov
Eurasian Journal of Physics and Functional Materials, 2023, 7(3), 139-147
2. Грант Российского научного фонда № 23-12-00042

MPD ITS-6-35 geometric model

ITS-5-35 model with **OB** consisting of 3 layers of standard MAPS:

Sensitive area: **15×30 mm²**

Thickness: **50 μm**

Number of pixels: **512×1024**

Pixel size: **28×28 μm²**.




and **IB** consisting of 3 layers of bended staves of MAPS (**15 um** pitch) with large area and thickness of **30 μm**

Size of bended MAPS:


1 layer - **280*56.5 mm²**

2 layer - **280*75.5 mm²**

3 layer - **280*94.0 mm²**

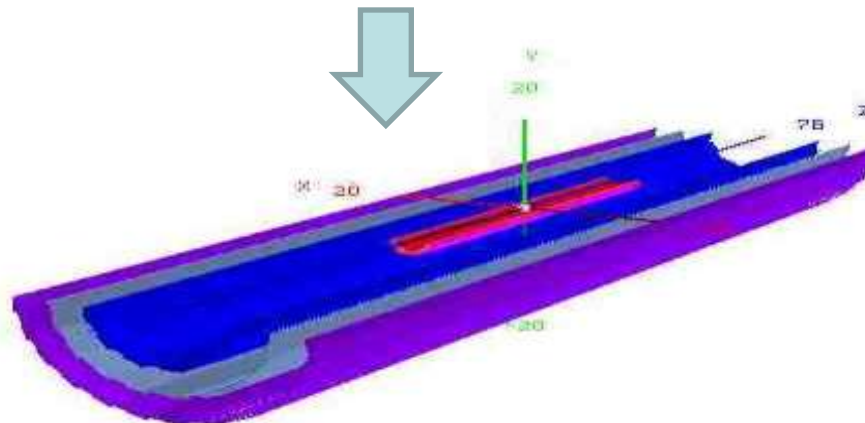




Reconstruction of D^+ and D^0 with ITS-6-35 model in Au+Au central collisions at $\sqrt{s_{NN}} = 9$ GeV

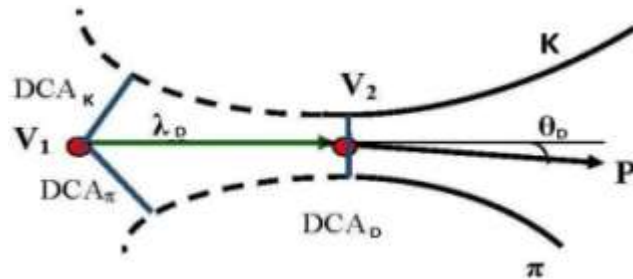

- Used methods :
- 1) Track finder: **KF**
 - 2) Particle identification: **TOF + dE/dx**
 - 3) Track analysis: **ML (MVA)**

MVA input:
 λ_D (D path),
 θ_D (pointing angle),
 DCA_D (π -K- π sum distance)

MVA cuts:
 $DCA(\pi, K) > 0.012$ cm,
 $BDT_response > 0.35$

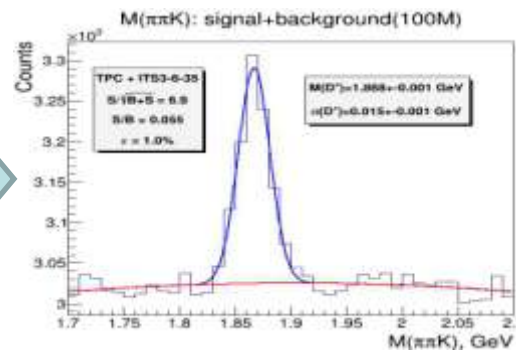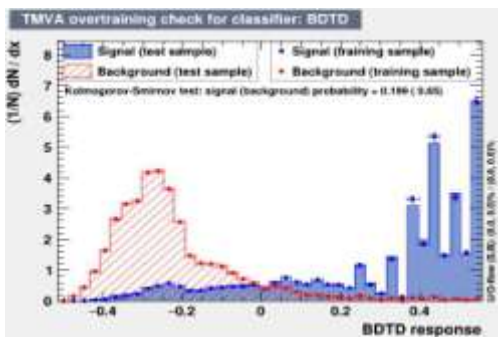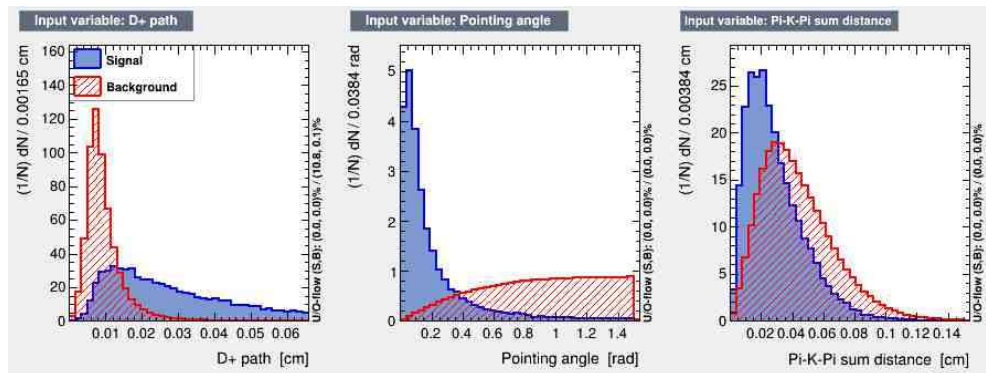


Particle	D^+	D^0
Efficiency, %	1.2	0.5
Significance	6.9	1.7
S/B(2σ) ratio	0.06	0.02

Conclusion

Quality assessment of the MPD tracking system (**TPC + ITS-6-40**) has been investigated when reconstructing charmed particles formed in AA collisions at NICA energies.

Simulation shows:


- feasibility of D mesons reconstruction in central Bi+Bi collisions at $\sqrt{s_{NN}} = 11$ GeV
- estimated meson yields opens up prospects for studying the heavy flavors physics at the NICA-MPD facility.

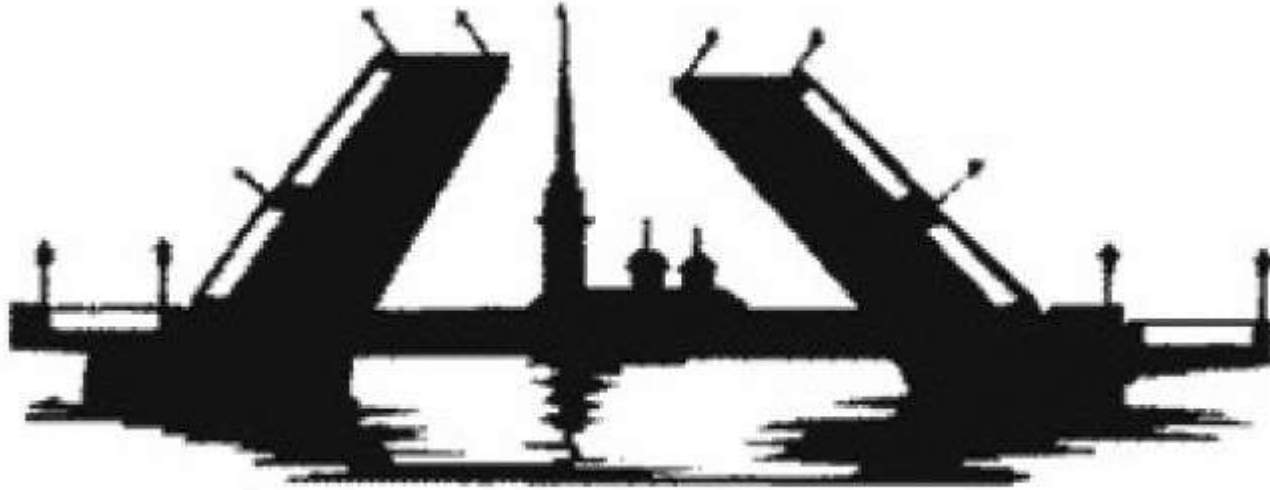

Thank you for your attention!



Back up slides

Input variables distributions for signal and background events after the gaussianisation and principal component decomposition (D⁺)

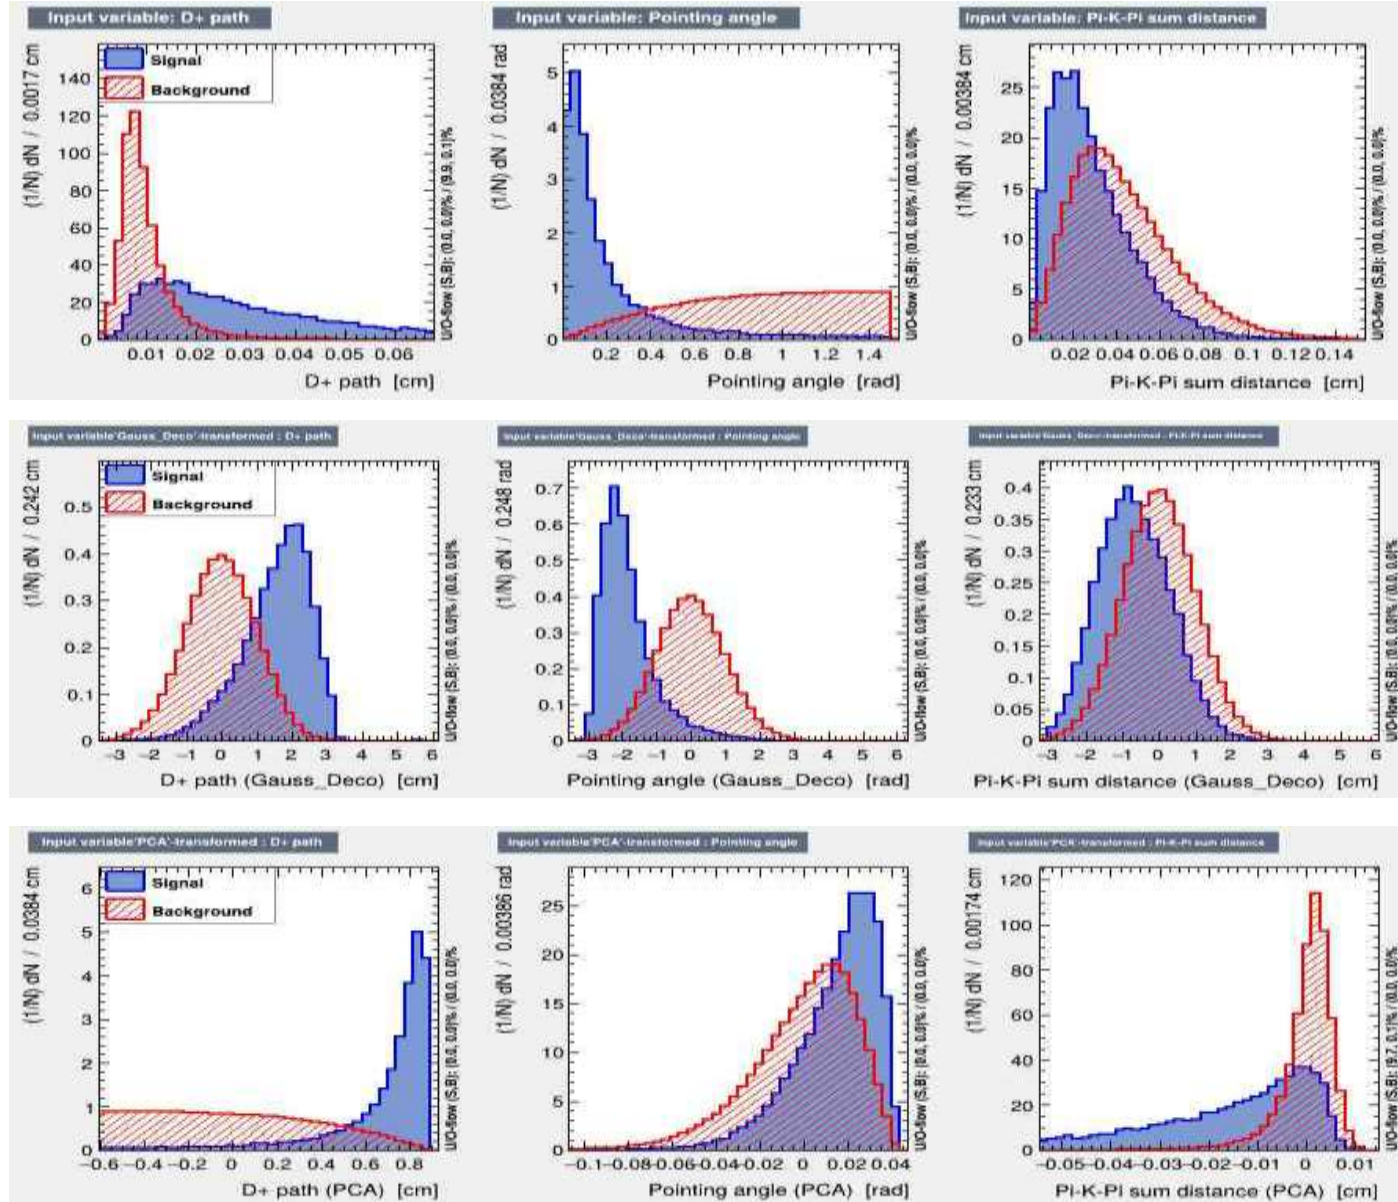



Example of getting invariant mass spectra of D^0 mesons

10^6 signal events after applying cuts

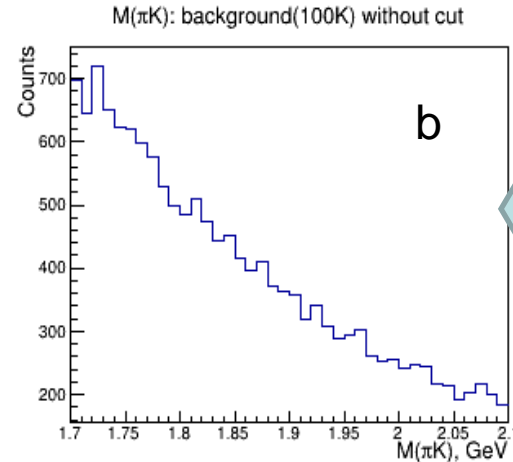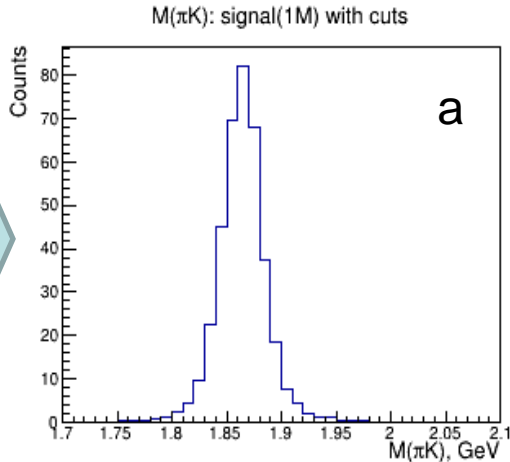

10^5 background events before applying cuts

10^5 background events after applying cuts

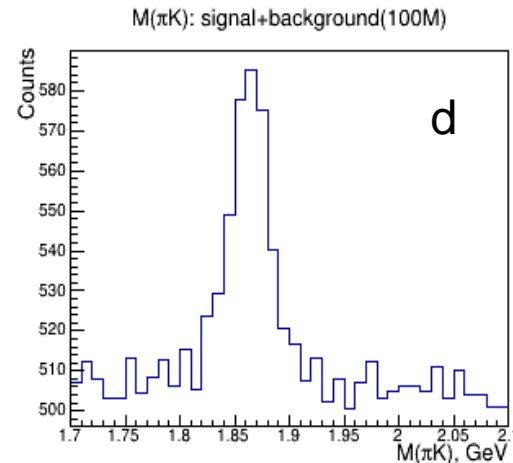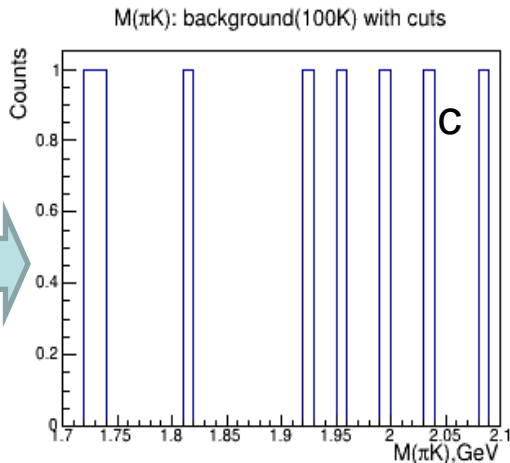

10^8 signal + background events after applying cuts

Background simulation - using **DCMSMM** generator (100K centralBi+Bi events)
Signal simulation - using **thermal** generator (1M decay events)
Resulting spectrum is normalizing to statistics of 100M central Bi+Bi events

D yields at NICA

- 1) efficiency: $\varepsilon = 1\%$ (D^+), $\varepsilon = 0.4\%$ (D^0)
- 2) interaction rate: $R=8 \cdot 10^3$ events/sec
- 3) central collision fraction: $\delta=0.1$.
- 4) multiplicity of D in central AA collisions at NICA: $M=10^{-2}$ meson/event.
- 5) branching ratio of the D meson decay: $BR=9.2\%$ (D^+), $BR=3.9\%$ (D^0)
- 6) one month of continuous NICA operation: $T=2.6 \cdot 10^6$ sec
- 7) yield: $N_D = R \cdot \delta \cdot M \cdot T \cdot \varepsilon \cdot BR$

$N_D = 19\,000$ mesons/month for $D^+ \rightarrow \pi^+ \pi^+ K^-$

$N_D = 3\,200$ mesons/month for $D^0 \rightarrow \pi^+ K^-$