Measurement of ϕ(1020) elliptic flow in MPD at the production 25

D. Flusova
NR TPU, JINR LHEP

Data set

1. UrQMD Bi+Bi at √sNN = 9.2 GeV
   50M events (prod. req. 25)
2. Centrality determination:
   evCentrality wagon
3. Particle identification: evPID wagon
4. Event plane measurements:
   evPlane wagon
5. ϕ meson flow measurements:
   flowEpPairKK

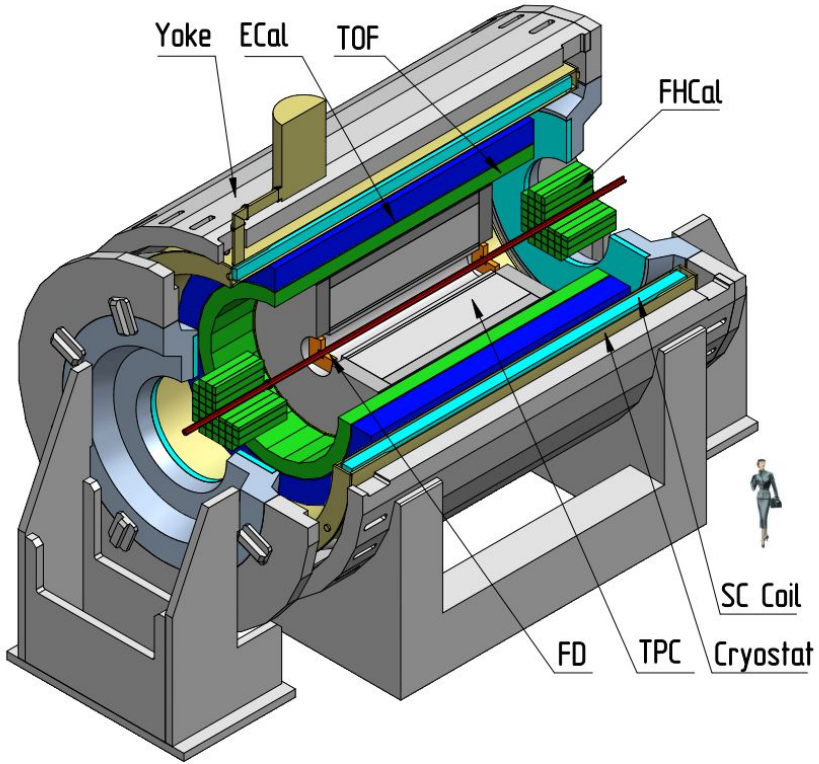

Previous result: minv fit

Used cuts:

Event selection: $|z_{vrtx}| < 130$ cm

Track selection:

- Kaons identification within 2σ (TPC and TOF)
- $N_{hits} > 24$
- $p_T > 0.1$ GeV/c
- $|DCA| < 2\sigma$
- Kaon pair $-0.6 < y_{K^+K^-} < 0.6$

Mixed events selection: $-0.6 < y_{K^+K^-} < 0.6$

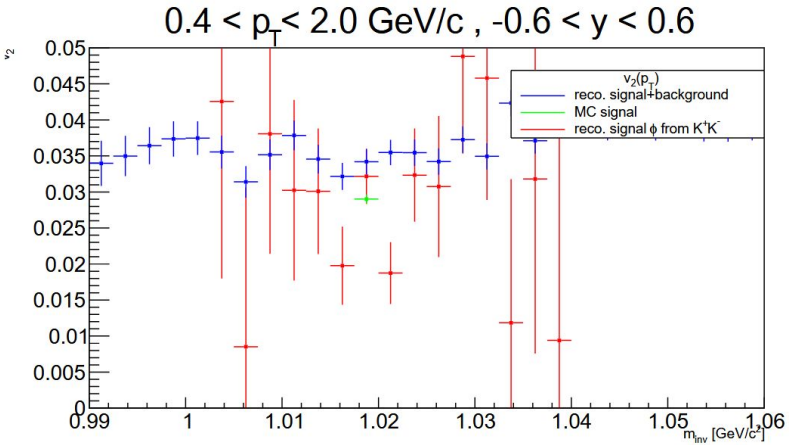

mass invariant method 10-60 %

Signal v2 and background v2 are similar - can not distinguish between them very well.

Description of Δϕ method

1. m_{inv} in 10 bins $(\varphi - \Psi_{RP})$
2. Background rejection from invariant mass distribution of ϕ (1020) meson
3. Fitting the signal peak and integrating it
4. Fitting yields with Fourier series:

$$\frac{dN}{d(\phi - \Psi)} = 1 + 2 \cdot v_2 \cos(2 \cdot (\phi - \Psi))$$

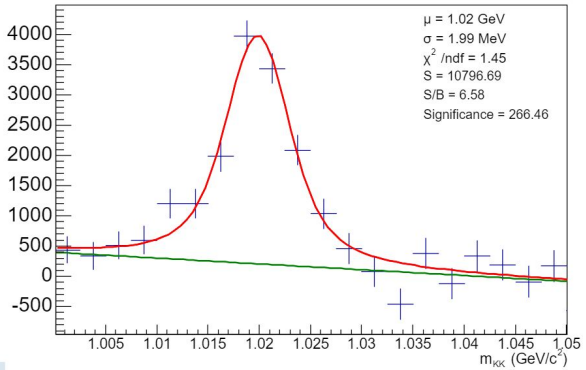

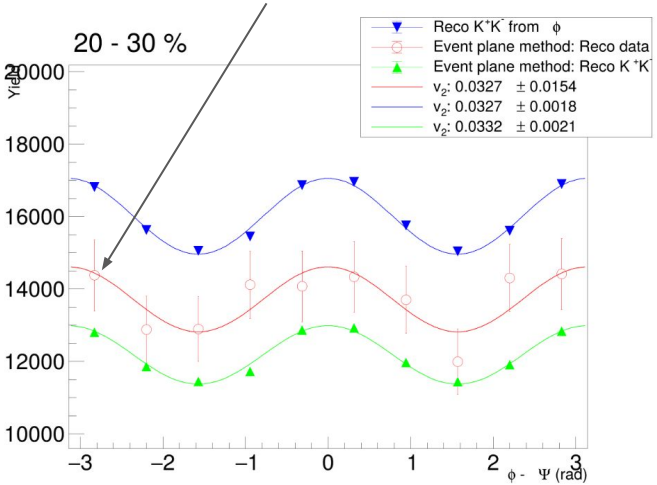

Selection criteria

Event selection: $|z_{vrtx}| < 130\,cm$

Track selection:

- Kaons identification within 2σ (TPC and TOF)
- Nhits > 24
- pT > 0.1 GeV/c
- |DCA| < 2σ
- Kaon pair $-1 < y_{K^+K^-} < 1$
- **Pion mass cut:** $m_{\pi+\pi-} < 0.4\ GeV/c^2$ & $m_{\pi+\pi-} > 0.6\ GeV/c^2$

Mixed events selection: $-1 < y_{K^+K^-} < 1$

$0.4 < p_T < 2.0\ GeV/c$

$-\pi < \Delta\varphi < \pi$

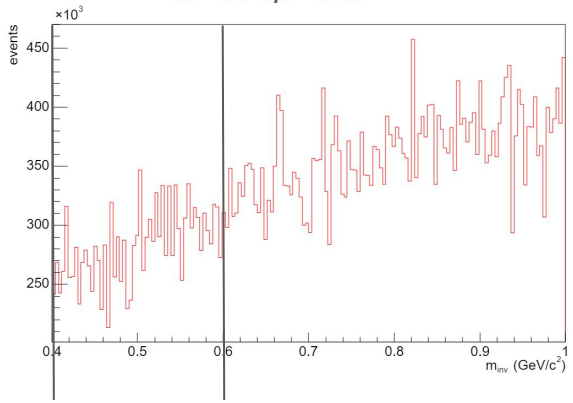

Invariant mass distribution: background rejection

1. Getting signal and mixed distribution;
2. Scaling and subtraction of signal and background
3. Calculated signal was fitted with Voigt function for peak and linear function for background

after scaling and before subtraction

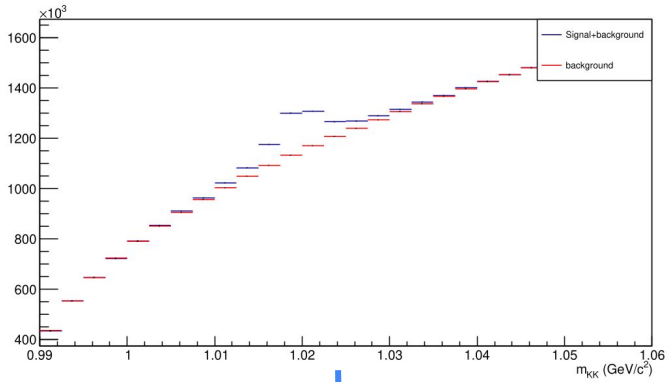

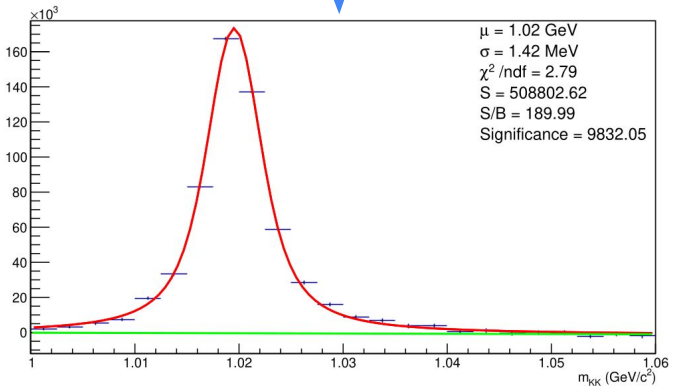

after scaling and subtraction

Results

- (Reco full) reconstructed data (with background subtraction);
- (Reco signal)
  $\Delta\phi$ method for reconstructed data:
  pdg = 321(K+) and -321(K-)
  mother particle pdg = 333 (phi meson);
- **(True)** Monte Carlo data;
  mother particle pdg = 333 (phi meson);

50M UrQMD Bi+Bi at √sNN = 9.2 GeV

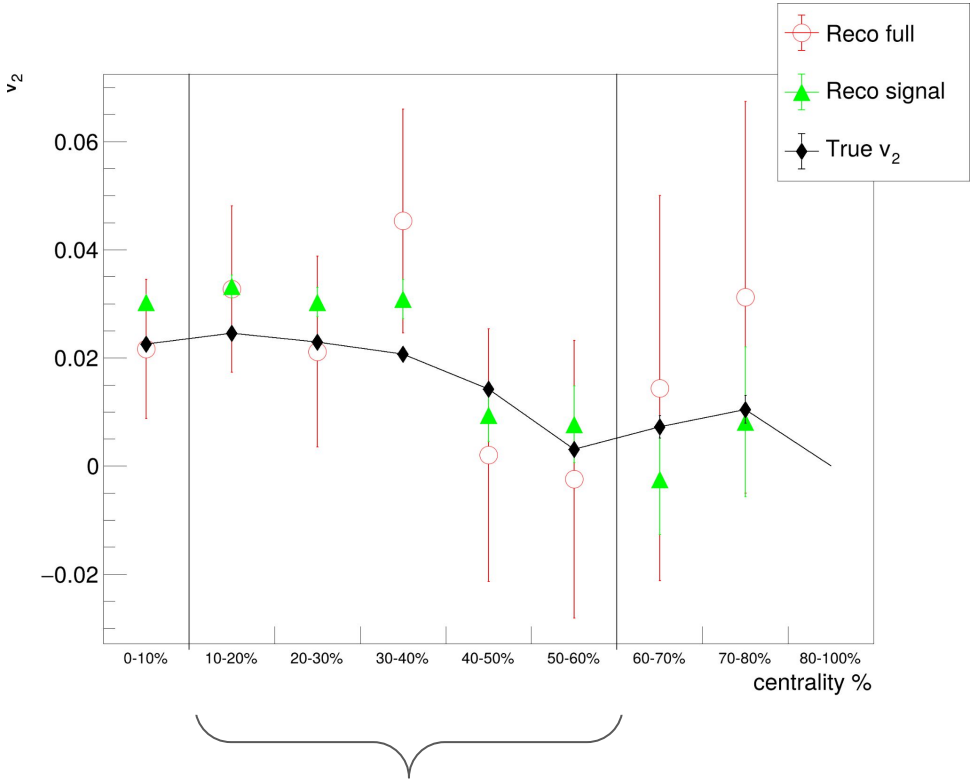

Reasonable centrality classes (10-60) %

evFlowEpPairKK: analysis wagon

Required wagons

- centrality from evCentrality wagon
- reaction plane from evPlane wagon
- PID calculations evPID wagon .

Output

- 3D distributions TH3F $(p_T, \Delta\phi, m_{inv})$ and $(p_T, \mathrm{y}, m_{inv})$
- mixed event distributions for back rejection
- evFlowEpPairKK wagon will be added to mpdroot framework

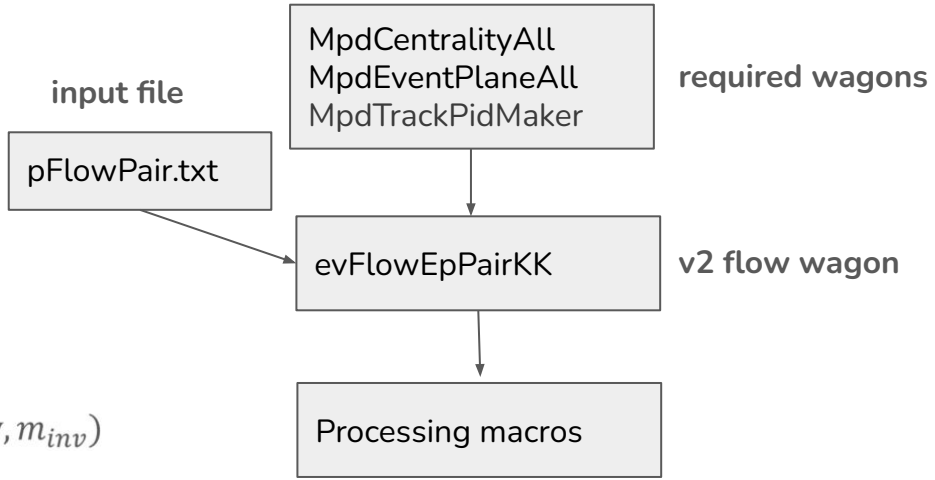

Main parts:

1. **MpdSignal class**: background rejection

2. **MpdSignalFit class:** fitting and yield calculation

3. **get_mInv()**: flow calculation

evFlowEpPairKK : Input configuration file

```
#-------Parameters used for analysis------
# Event selection:
mZvtxCut     130 //  cut on vertex z coordinate
# PID cuts:
mPIDsigTPC   2  // dEdx PID parameters
mPIDsigTOF   2 // dEdx PID parameters
mNofHitsCut  24 // minimal number of hits for a track
mEtaCut      999  // maximal pseudorapidity for a track
mPtminCut    0.1  // minimal pt for a track
mDCACut      2.0  // maximum DCA for a track
# Pair cuts:
mYCut        1.0  // pair rapidity cut
```

pFlowPair.txt

Summary

- v_2 has been calculated with $\Delta\phi$ method;
- cut on $K^0_S \rightarrow \pi^+\pi^-$was applied and results were compared with true MC data:
  - current statistics is insufficient (50M)
  - (10-60) % are reasonable centrality classes for further calculations

Outlook

- $\Delta\phi$ method with realistic EP and resolution correction
- Analysis wagon will be added to mpdroot framework

Backup

Different centrality classes

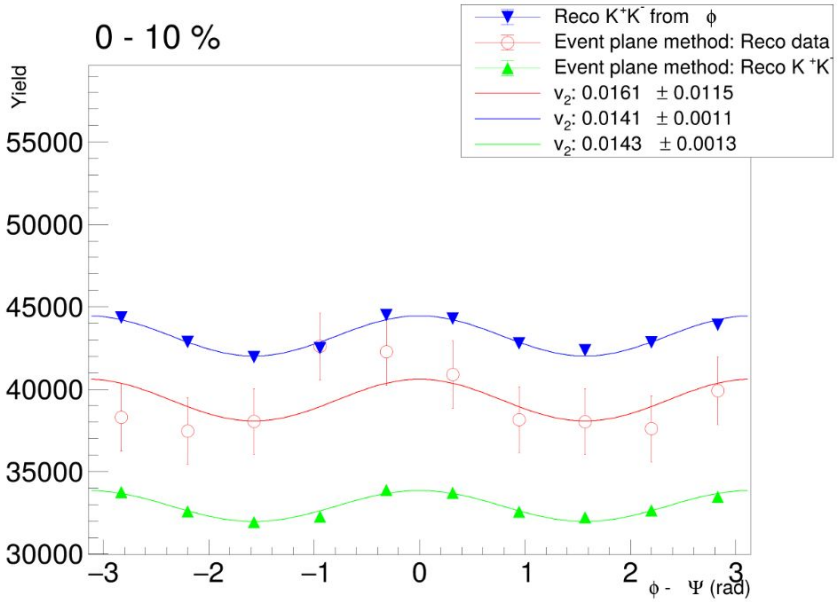

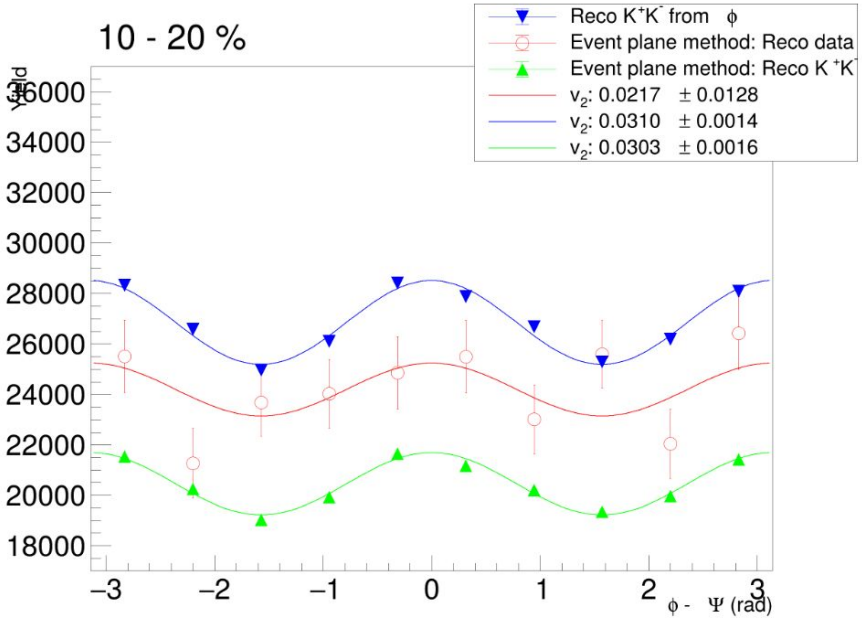

Different centrality classes

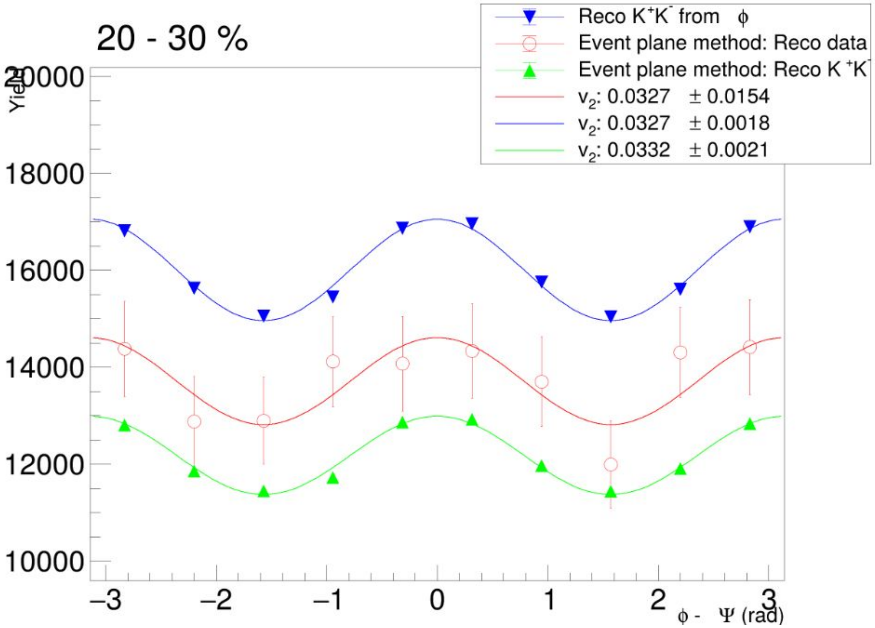

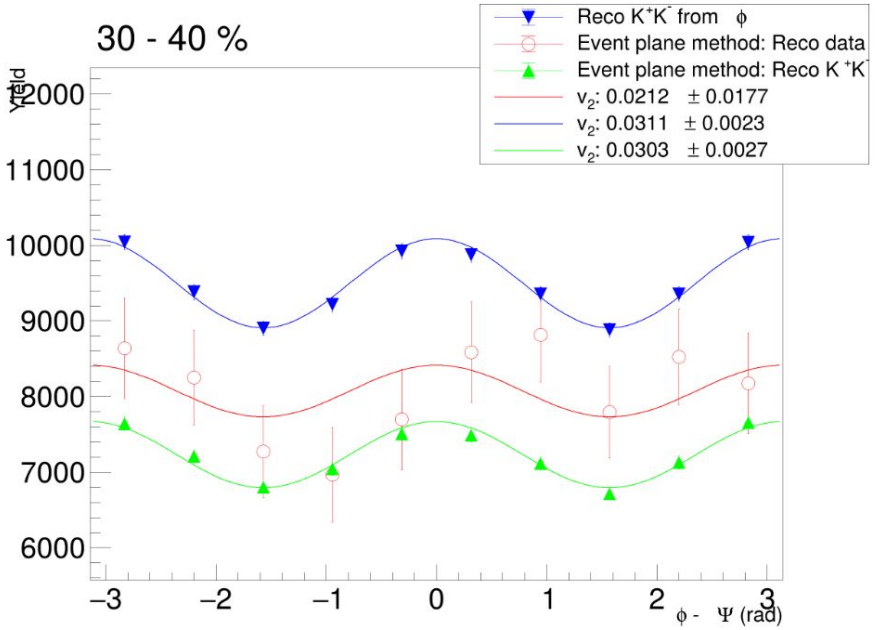

Different centrality classes

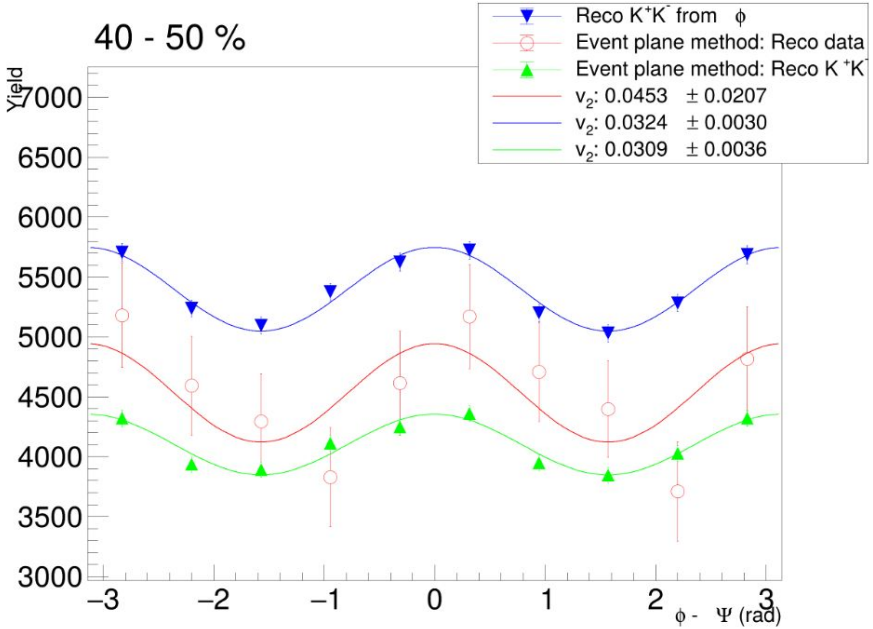

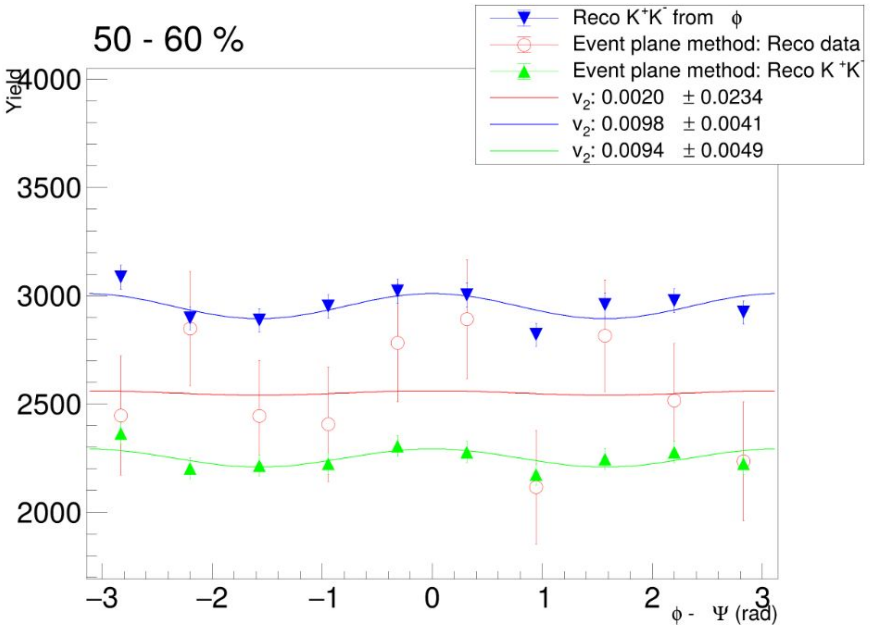

Different centrality classes

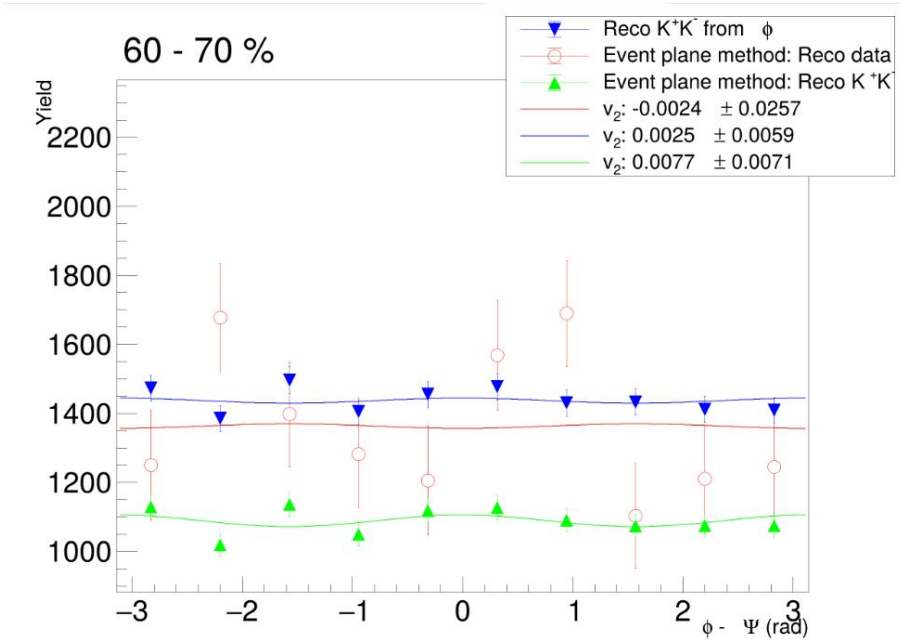

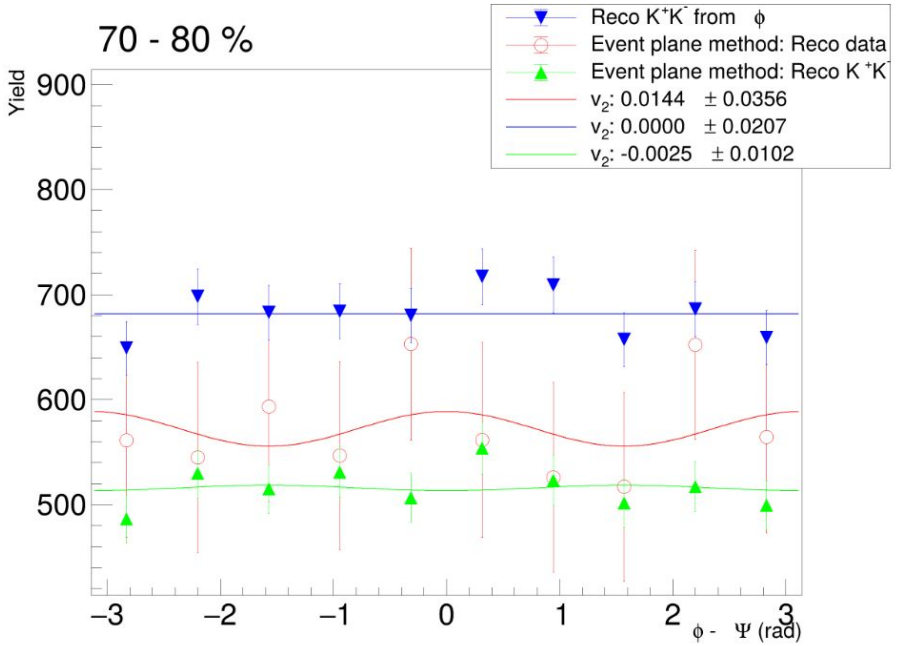

Different centrality classes

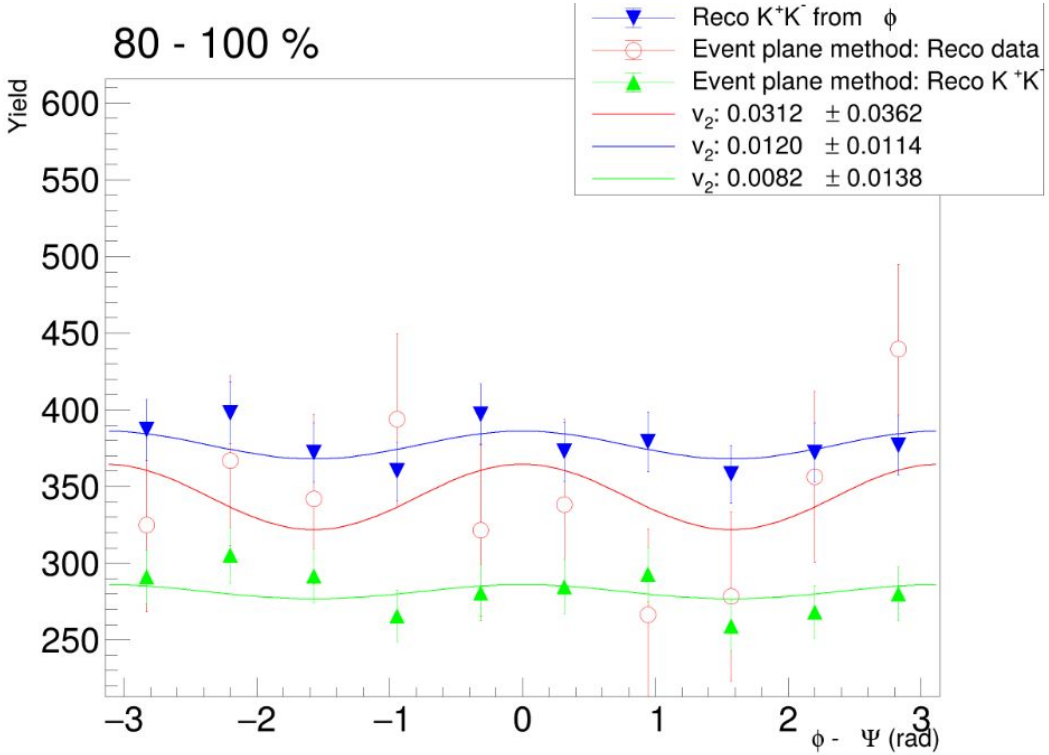

Previous result: minv fit

Same cuts

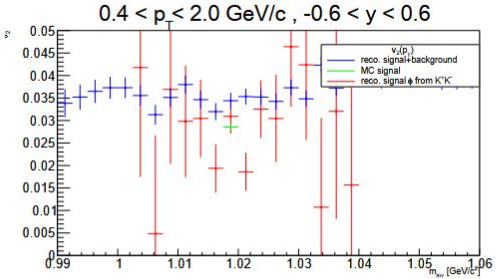

20-70 %

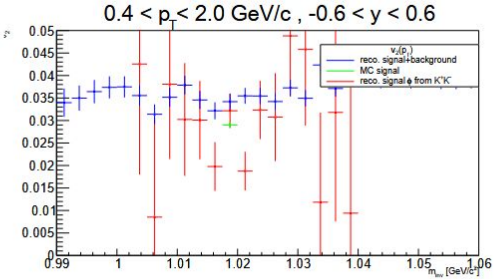

20-60 %

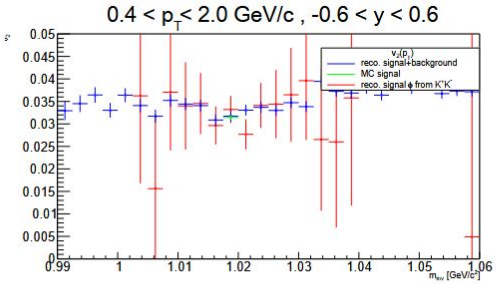

10-40 %

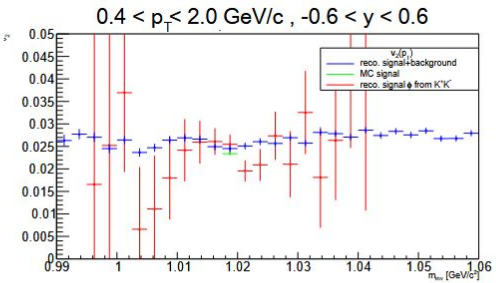

0-80 %

Signal v_2 and background v_2 are similar